



Edge Shield Gravel Stop

- Applicable with most roofing systems
- Installation with continuous 20 gauge galvanized cleat
- Pre-punched holes for proper fastener placement
- ANSI/SPRI ES-1 tested
- International Building Code (IBC 2003 & 2006) compliant*
- Concealed splice plates (optional)
- Flange dimension fabricated to suit roofing system requirements
- Standard finish is PVDF fluoropolymer coating in 30 standard and metallic colors
- 35 year finish warranty

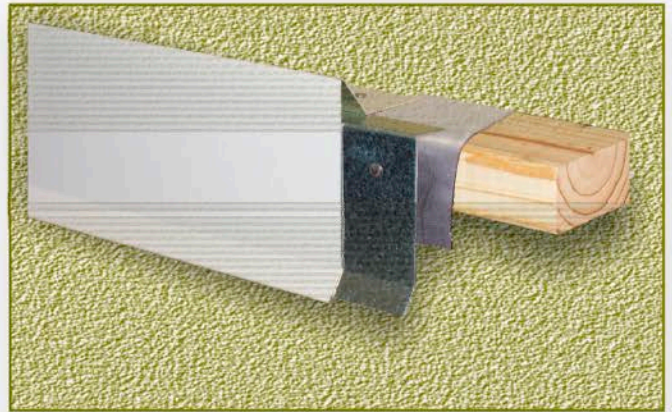

**ANSI/SPRI ES-1
Tested Product**

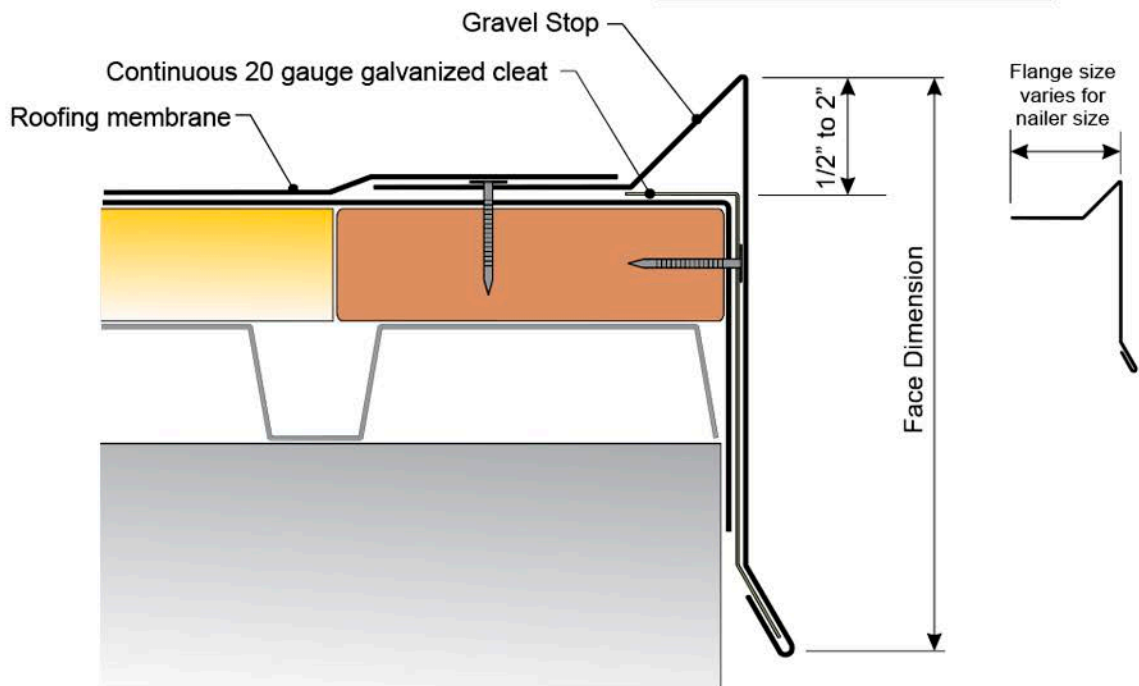

Material Options:

- 24 gauge (0.63 mm) galvanized steel
- 22 gauge (0.76 mm) galvanized steel
- 24 gauge (0.063 mm) stainless steel
- 0.040" (1.0 mm) aluminum
- 0.050" (1.2 mm) aluminum
- 0.063" (1.5 mm) aluminum

Finish Options:

- Standard Kynar 500® colors (see color chart for availability)
- Custom Kynar® colors
- Plain galvanized steel or "paintgrip"
- Mill finish aluminum
- Anodized aluminum
- 2B finish stainless

***International Building Code requirement:**

2003 IBC § 1504.5: "Edge securement for low-slope roofs. Low-slope membrane roof systems metal edge securement, except gutters, installed in accordance with Section 1507, shall be designated in accordance with ANSI/SPRI ES-1, except the basic wind speed shall be determined from Figure 1609."

Kynar 500® is a registered trademark of Arkema, Inc. Information subject to change without notice. Refer to MPSI installation instructions and details for additional information.



METAL
Panel Systems, Incorporated
Architectural Sheet Metal

11506 Reading Road, Cincinnati, Ohio 45241-2512

Tel: 800-554-6126, 513-554-6120 Fax: 513-554-6121

www.metalpanelsystems.com
info@metalpanelsystems.com