



MP-100 Panel

- Architectural (solid substrate)
- Snap on seam allows panels to be installed in two directions
- Application on 3:12 slopes and greater
- Continuous panel lengths. Field forming available.
- Panels expand and contract freely
- One-piece concealed clip
- Ideal for roof slope transitions or eave turn-down detail
- CURVING: MP-100 Panel can be curved concave or convex (consult MPSI for minimum radius requirements)
- TAPERING: MP-100 Panel can be tapered for conical shaped roof structures
- Standard finish is PVDF fluoropolymer coating in 30 standard colors (Custom colors available)
- 35 year finish warranty
- Standard colors are listed with the Energy Star Cool Roof Program.

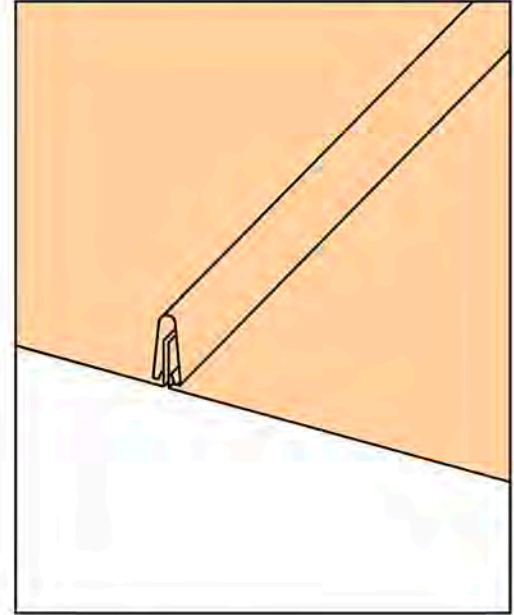

Panel Profile

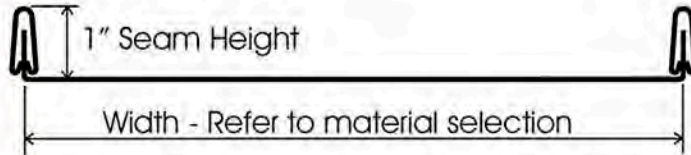


Material	Standard Width	Optional Widths
22 ga. Steel	14-1/2"	12", 18-1/2"
24 ga. Steel	14-1/2"	12", 18-1/2"
.040" Aluminum	12"	14-1/2"
.032" Aluminum	12"	14-1/2"
16 oz. Copper	13-1/2"	12, 18-1/2"

Optional widths require minimum quantities and slightly longer lead times. 22 gauge steel available in minimum quantities. Other materials and gauges are available. Minimum quantities may apply. Custom widths are available. Consult MPSI for costs and lead times.


Oil canning: Metal Panel Systems, Inc. purchases prime commercial grade light gauge metal which is manufactured to all industry accepted tolerances. "Oil canning" is an inherent part of light gauge cold formed panels and is not cause for rejection.

Panel Clip




MP-100 Standard Clip (MP100SC)

Optional Surface Patterns

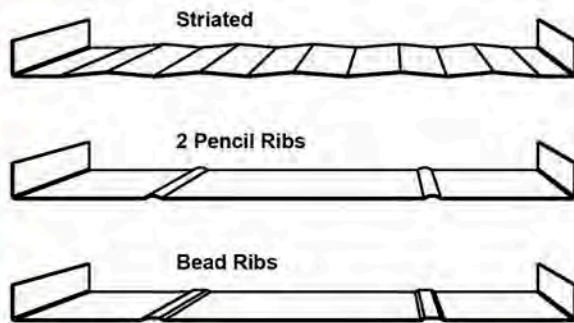

Seam Profile

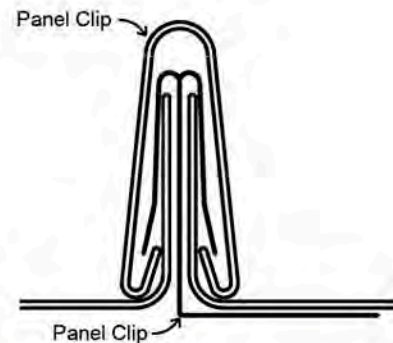

Refer to product installation instructions for additional information.



11506 Reading Road, Cincinnati, Ohio 45241-2512

Tel: 800-554-6126, 513-554-6120 Fax: 513-554-6121

www.metalpanelsystems.com
info@metalpanelsystems.com