Description:	Detail No.:
EAVE DETAIL WITH SOFFIT	MPS-ED3
	Date: 7/21/26
Substrate: SUITABLE SUBSTRATE	

METAL PANEL SYSTEMS
GAUGES ABOVE

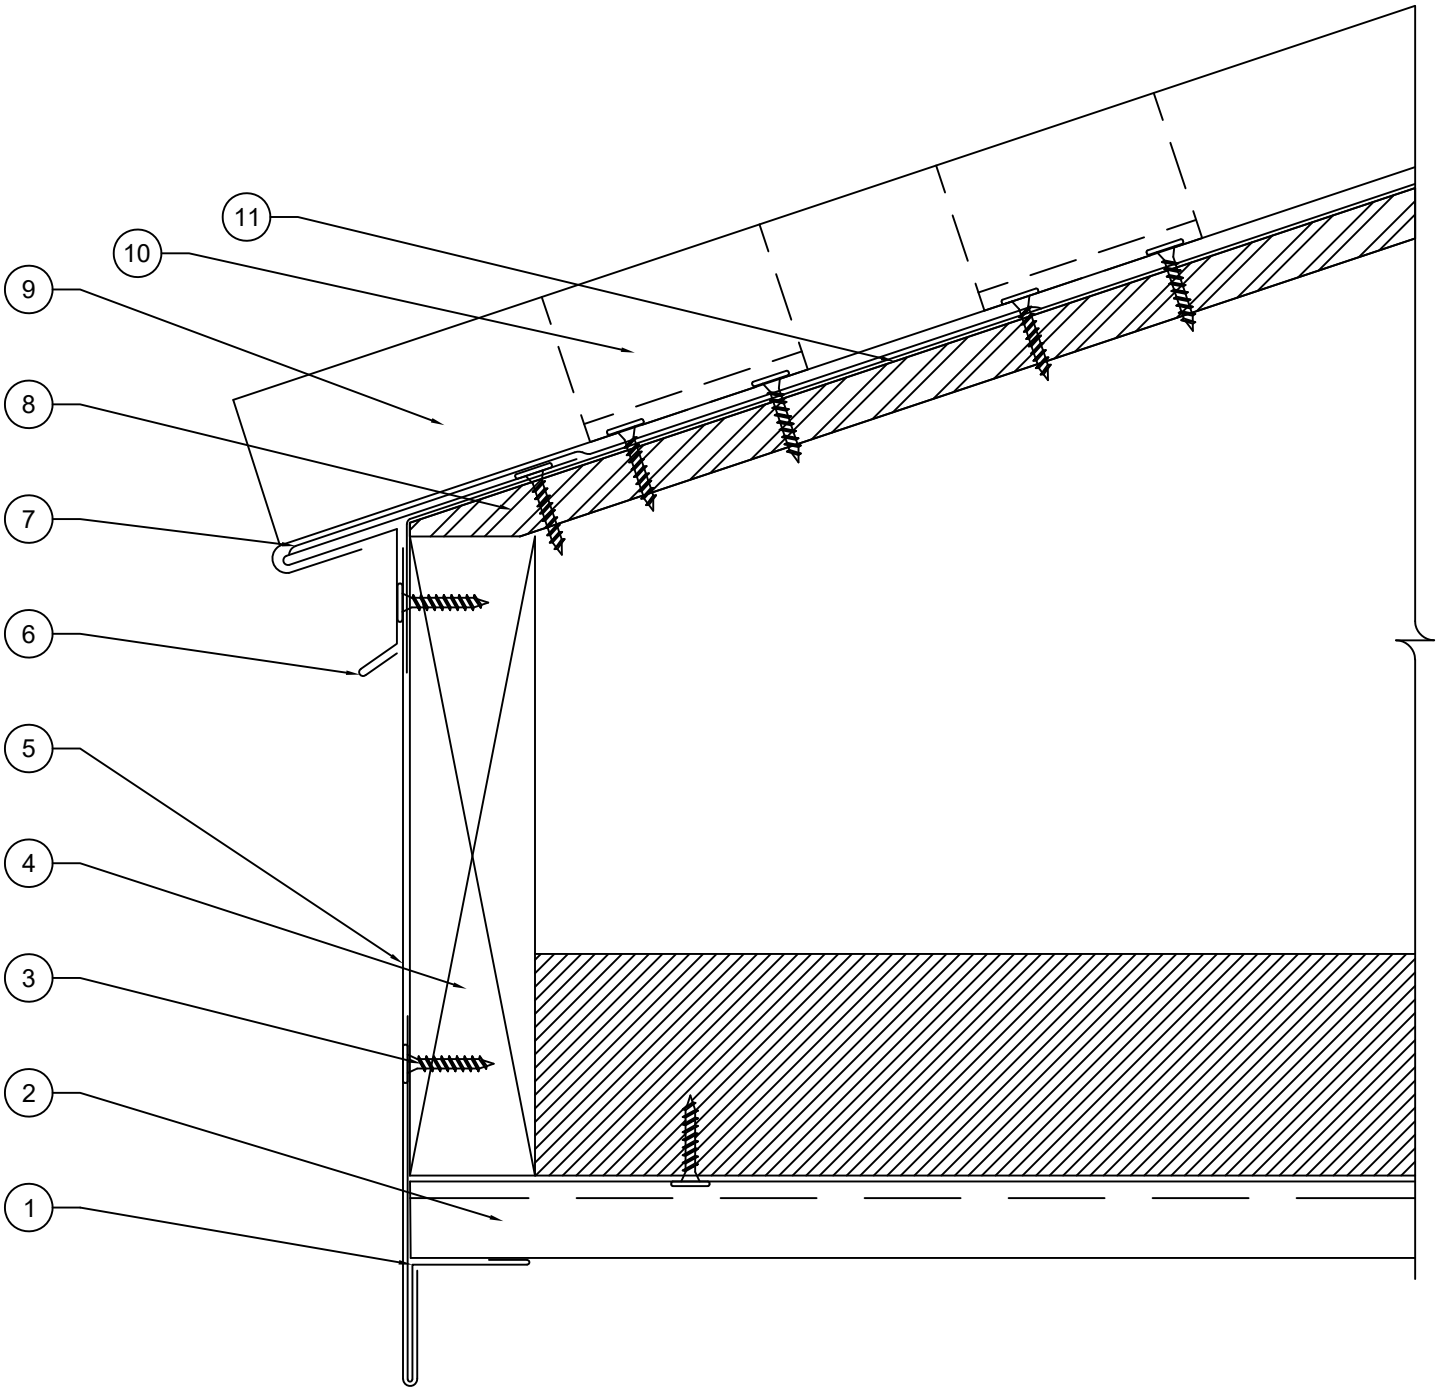

1. FASCIA CLEAT, FASTENED 24" O.C. WITH MPS APPROVED FASTENERS
2. MPS FLUSH PANEL, FASTENED THROUGH THE FLANGE 24" O.C. WITH MPS APPROVED FASTENERS
3. MPS APPROVED FASTENERS (#10 X 1-$\frac{1}{8}$" ULP PANCAKE HEAD WOOD SCREW SHOWN)
4. FASCIA BOARD NOT BY MPS
5. FASCIA COVER, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED 12" O.C. WITH MPS APPROVED FASTENERS
6. EAVE STARTER, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED 6" O.C. WITH MPS APPROVED FASTENERS
7. ADDITIONAL LAYER EPISTIK UNDERLAYMENT MINIMUM OF 9" TO STRIP IN EAVE STARTER
8. SUITABLE DECKING NOT BY MPS
9. MPS METAL PANEL (MP-200 SHOWN)
10. MPS PANEL CLIP WITH APPROVED FASTENERS 2 CLIPS AT THE BEGINNING OF THE PANEL
11. ONE LAYER OF MPS EPISTIK ALL OVER ROOF AND BEHIND ALL METAL FLASHINGS