


Berridge Tee-Panel


- Low profile seam
- Extruded vinyl weatherseal as integral part of Snap-On Seam
- Continuous panel lengths. Field forming available.
- Panels expand and contract freely
- One-piece concealed clip
- ASTM air and water infiltration tested
- ASTM E-1592 tested for structural performance
- UL-90 uplift resistance classified assemblies
- Standard finish is PVDF fluoropolymer coating
- 20 year finish warranty
- Colors available which meet Energy Star requirements for roof slopes greater than 2:12.

PRODUCT OPTIONS:

- *"Curved Tee-Panel" with radius as tight as 4' 0".*
- *"Tapered Tee-Panel" for cone shaped roof structures.*
- *"Compound Tapered" Tee-Panels for spherical shaped roofs.*

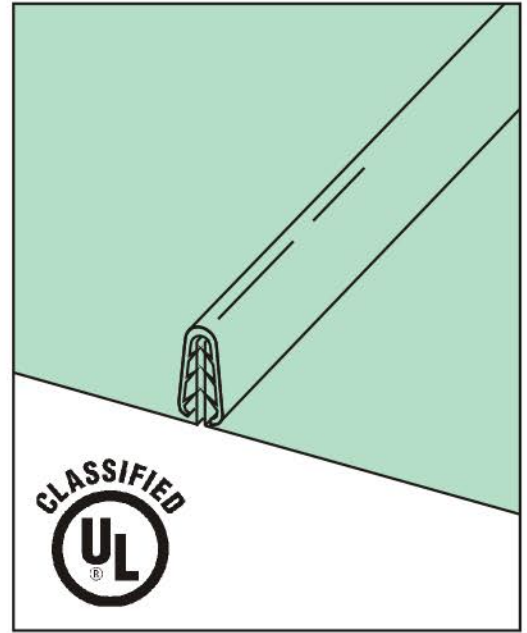

Panel Profile

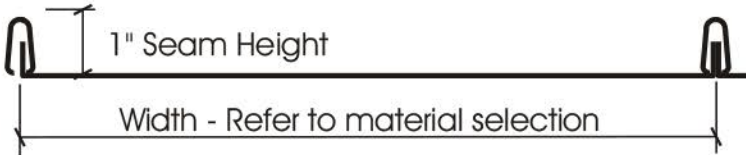


Material	Standard Widths	Optional Width
24 ga. Steel	12-3/4", 18-1/4"	14-3/4"

22 gauge steel available in minimum quantities. Consult MPSI for costs and lead times.

Oil canning: Metal Panel Systems, Inc. purchases prime commercial grade light gauge metal which is manufactured to all industry accepted tolerances. "Oil canning" is an inherent part of light gauge cold formed panels and is not cause for rejection.

Panel Clip

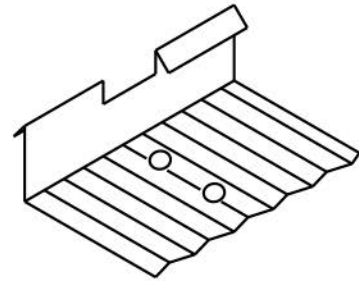


Standard Tee-Clip


Optional Surface Patterns*



Striated



2 Pencil Ribs



2 Bead Ribs

*Pattern notes:

1. Tapered panels available smooth only.
2. 12-3/4" wide Curved Tee-Panel available smooth only.

Seam Profile

