Description:	Detail No.:
EAVE DETAIL WITH SOFFIT	MPS-ED5
	Date: 7/21/26
Substrate: SUITABLE SUBSTRATE	

METAL PANEL SYSTEMS
GAUGES ABOVE

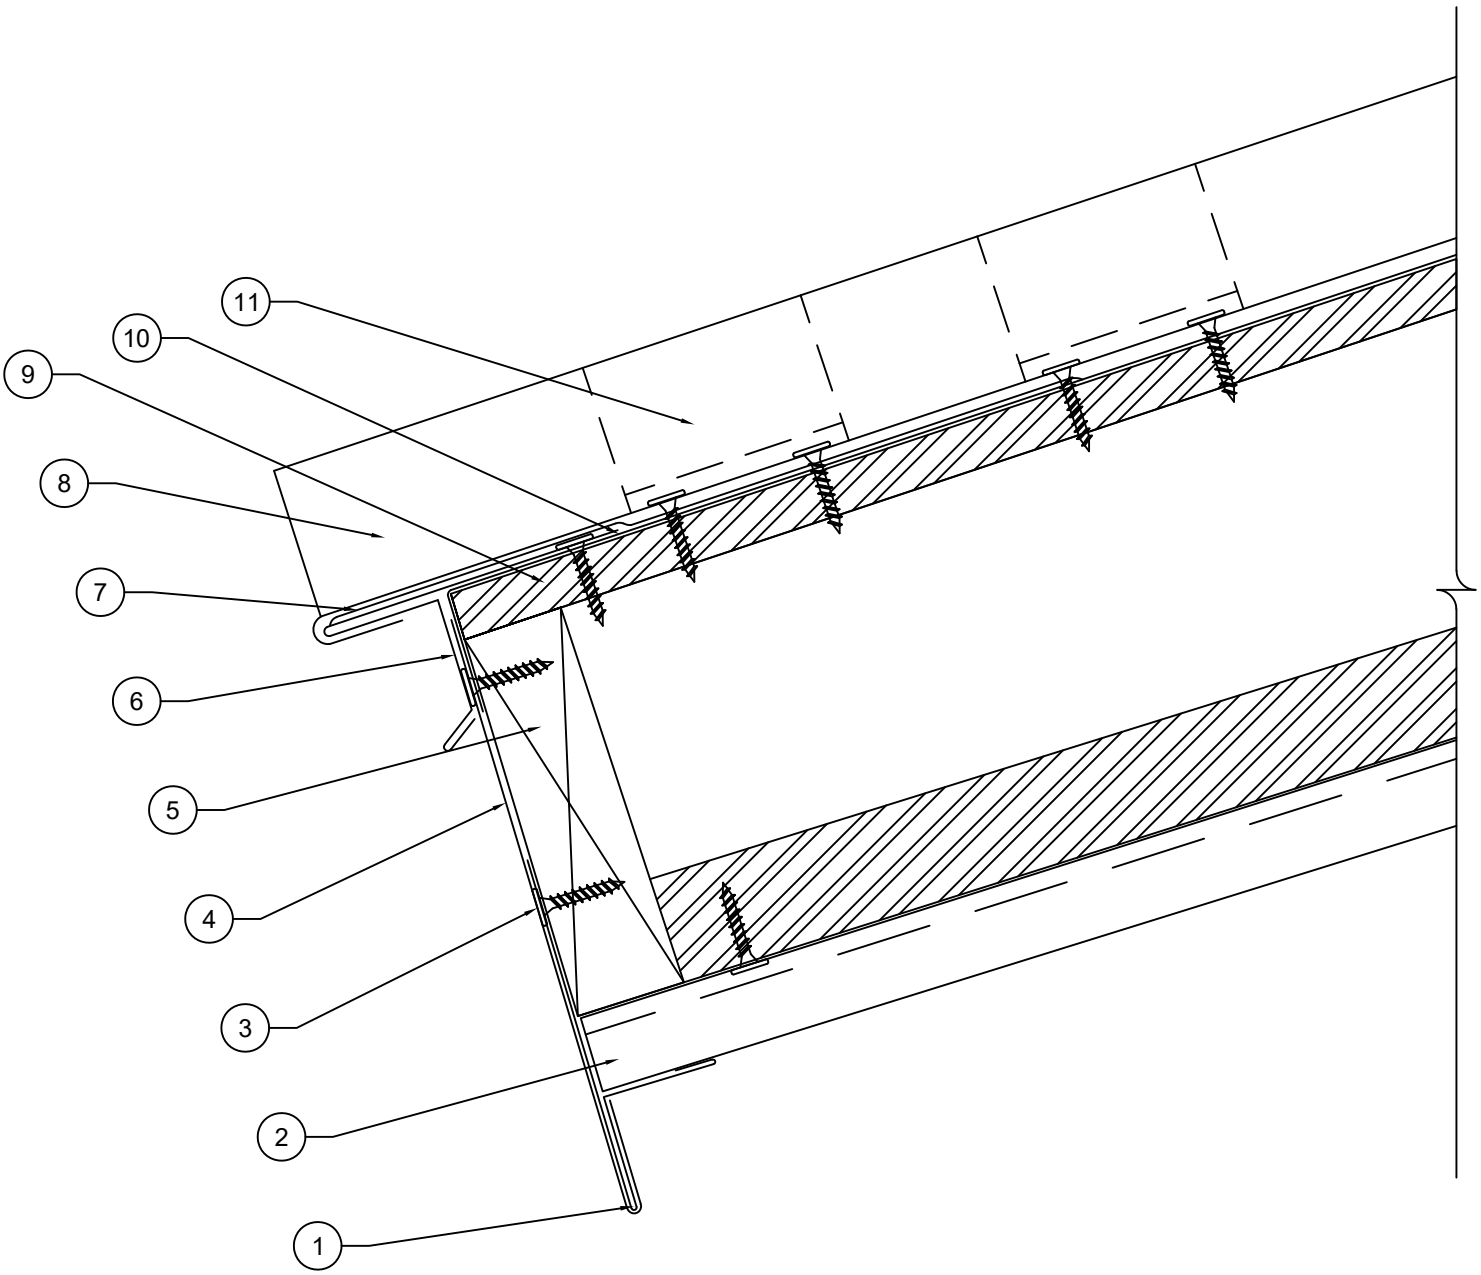

1. FASCIA CLEAT, FASTENED 24" O.C. WITH MPS APPROVED FASTENERS
2. MPS FLUSH PANEL, FASTENED THROUGH FLANGE AT 24" O.C. WITH MPS APPROVED FASTENERS
3. MPS APPROVED FASTENERS (#10 X 1-$\frac{1}{8}$" ULP PANCAKE HEAD WOOD SCREW SHOWN)
4. FASCIA COVER, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED 12" O.C. WITH MPS APPROVED FASTENERS
5. FASCIA BOARD NOT BY MPS
6. EAVE STARTER, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED 6" O.C. WITH MPS APPROVED FASTENERS
7. ADDITIONAL LAYER OF EPISTIK UNDERLAYMENT MINIMUM OF 9" TO STRIP IN EAVE STARTER
8. MPS METAL PANEL (MP-200 SHOWN)
9. SUITABLE DECKING NOT BY MPS
10. ONE LAYER OF MPS EPISTIK UNDERLAYMENT ALL OVER ROOF AND BEHIND ALL METAL FLASHINGS
11. MPS PANEL CLIP WITH APPROVED FASTENERS 2 CLIPS AT THE BEGINNING OF THE PANEL