| Description: | Detail No.: |
|---|---|
| EAVE DETAIL WITH WALL PANEL | MPS-EWP1 |
| | Date: 7/21/26 |
| Substrate: SUITABLE SUBSTRATE | |

METAL PANEL SYSTEMS
GAUGES ABOVE

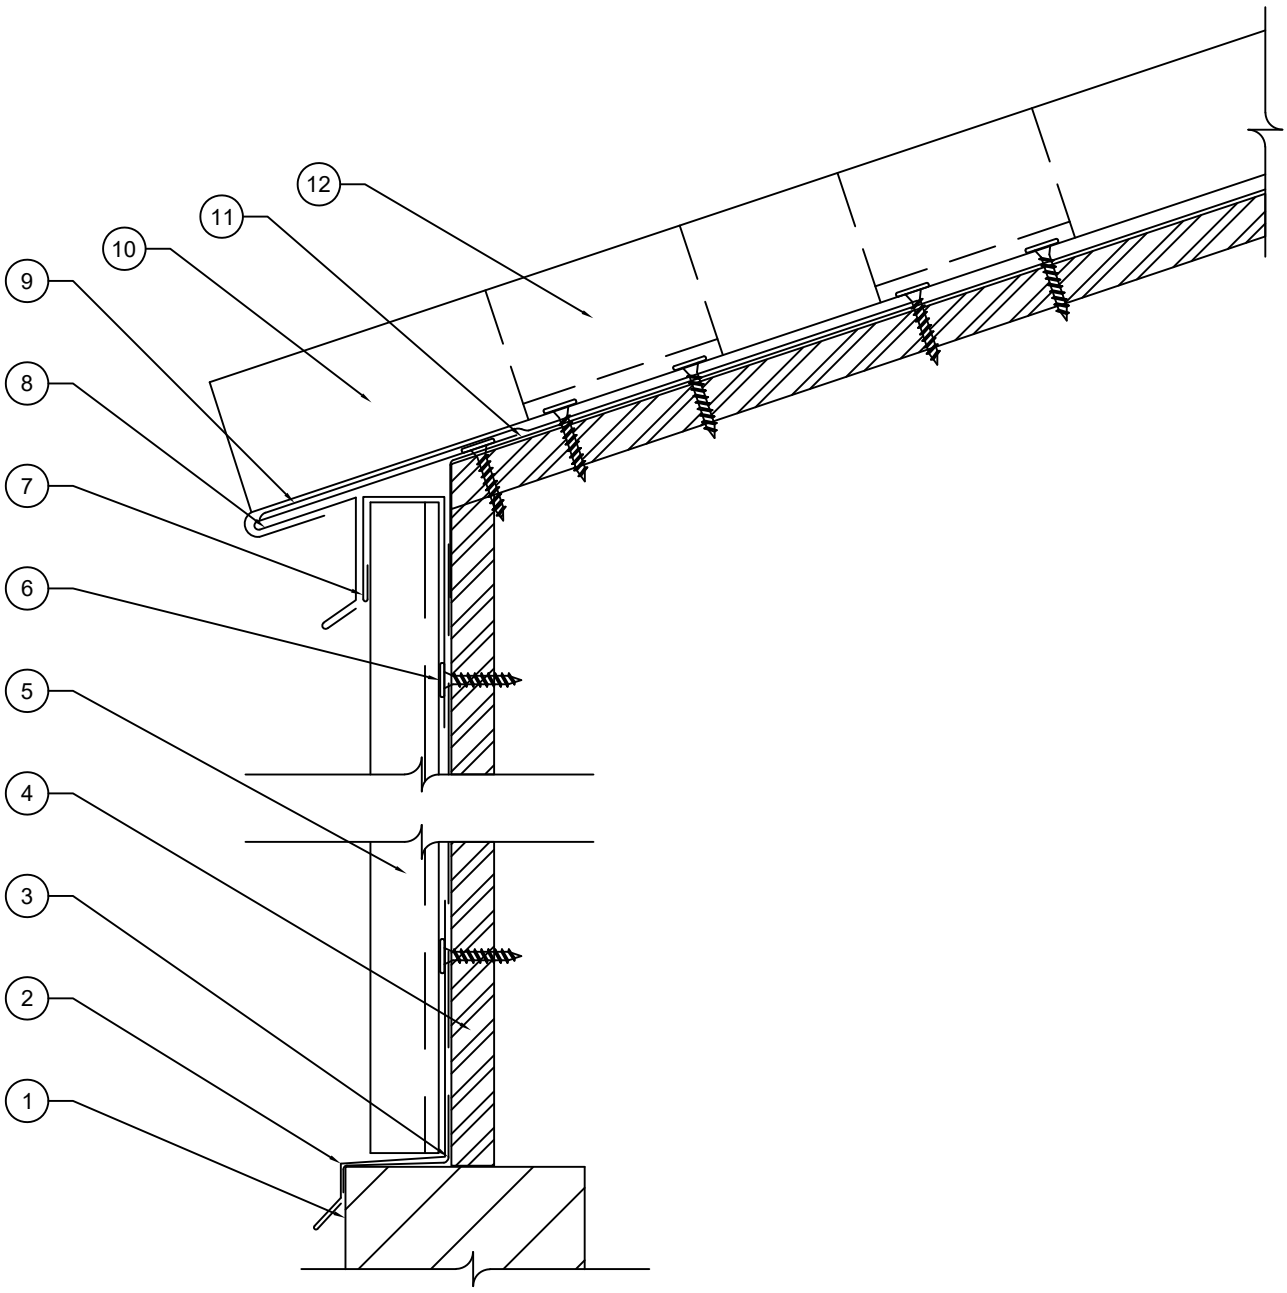


1. BRICK FACADE NOT BY MPS
2. SILL FLASHING, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED 12" O.C. WITH MPS APPROVED FASTENER
3. BUILDING WRAP NOT BY MPS
4. SUITABLE WALL DECKING NOT BY MPS
5. MPS VERTICAL WALL PANEL
6. MPS APPROVED FASTENERS (#10 X 1-$\frac{1}{8}$" ULP PANCAKE HEAD WOOD SCREW SHOWN)
7. J-CHANNEL, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED 12" O.C. WITH MPS APPROVED FASTENER
8. EAVE STARTER, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED 6" O.C. WITH MPS APPROVED FASTENERS
9. ADDITIONAL LAYER OF EPISTIK UNDERLAYMENT MINIMUM OF 9" TO STRIP IN THE EAVE STARTER
10. MPS METAL PANEL (MP-200 SHOWN)
11. ONE LAYER OF MPS EPISTIK UNDERLAYMENT ALL OVER ROOF AND BEHIND ALL METAL FLASHINGS
12. MPS PANEL CLIP WITH APPROVED FASTENERS INSTALL 2 CLIPS AT THE BEGINNING OF THE PANEL