Description:	Detail No.:
HIGH WALL AT COPING DETAIL	MPS-HWC1
	Date: 7/21/26
Substrate: SUITABLE SUBSTRATE	

METAL PANEL SYSTEMS
GAUGES ABOVE

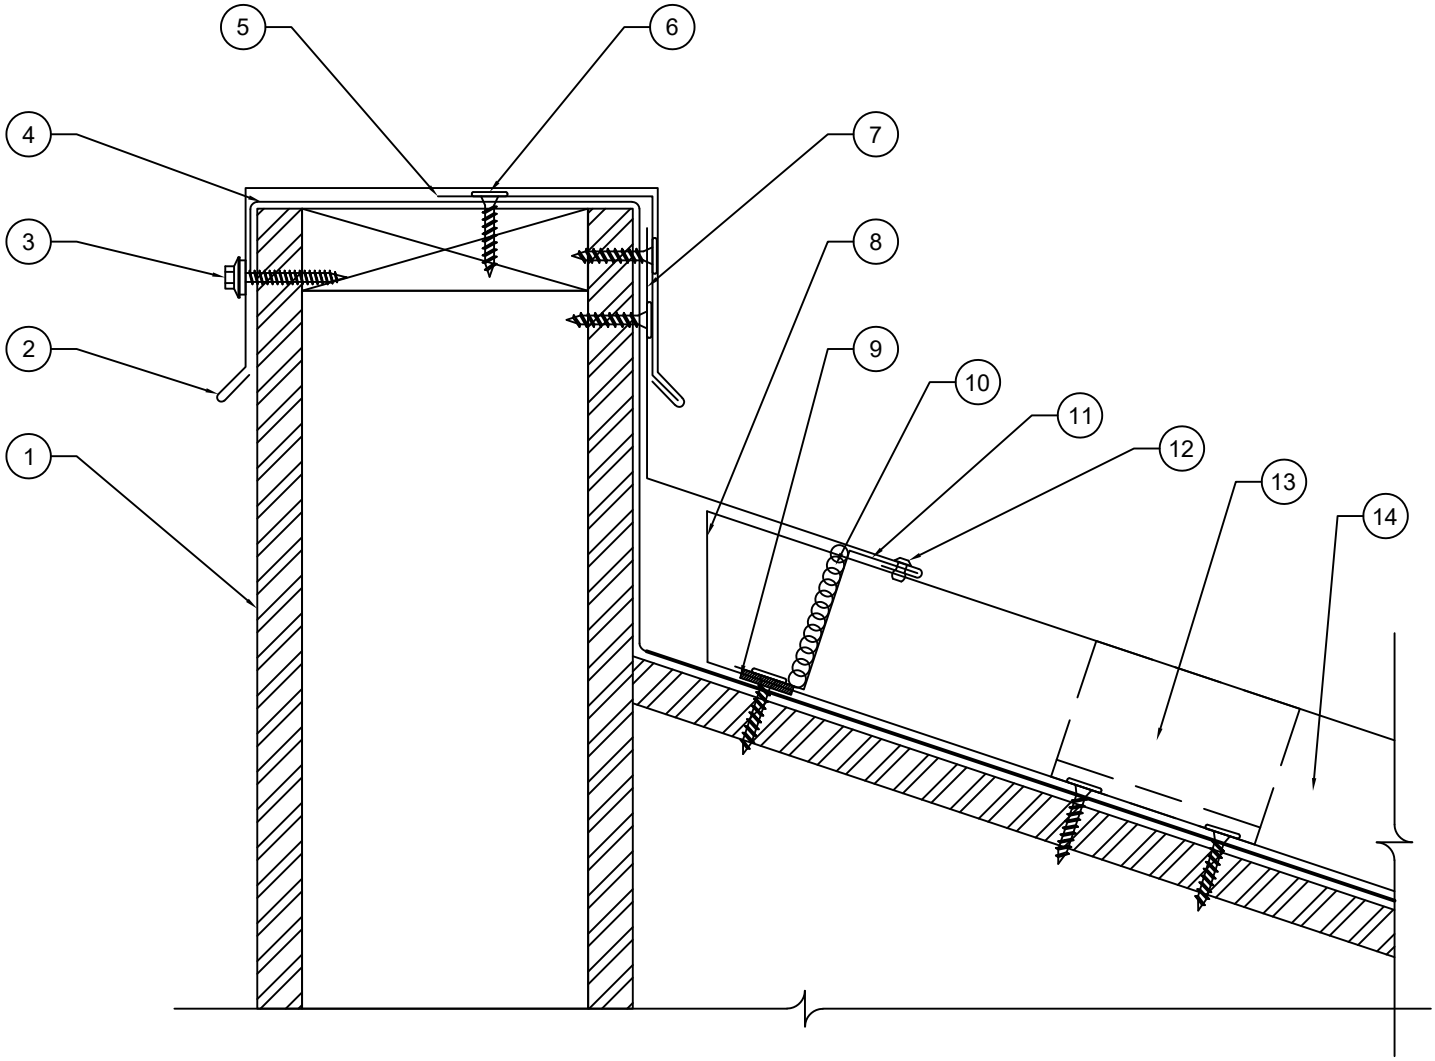

1. SUITABLE DECKING NOT BY MPS
2. MPS COPING CAP, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP,FASTENED 6" O.C. WITH MPS APPROVED FASTENER
3. MPS APPROVED FASTENER (#14 X 1-$\frac{1}{2}$" HWH PANTITE WOOD SCREW)
4. ONE LAYER OF MPS EPISTIK ALL OVER THE ROOF AND BEHIND ALL METAL FLASHINGS
5. COPING CAP CLEAT, FASTENED ON FRONT AND ON TOP AT 12" O.C. WITH MPS APPROVED FASTENERS
6. MPS APPROVED FASTENER (#10 X 1-$\frac{1}{8}$" ULP PANCAKE HEAD WOOD SCREW SHOWN)
7. HIGH WALL FLASHING, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED AT 6" O.C. WITH MPS APPROVED FASTENER
8. BREAD PAN AT END OF PANEL WITHOUT CUTTING CORNERS
9. MPS APPROVED BUYTL TAPE CONTINUOUS
10. CONTINUOUS BEAD OF MPS APPROVED SEALANT UP THE VERTICAL LEG OF Z-CLOSURES
11. Z-CLOSURES FIELD CUT SET INTO BUYTL TAPE AND FASTENED 4" O.C. INSTALL MPS APPROVED SEALANT ON THE VERTICAL LEGS OF Z-CLOSURE SEALING TO PANEL LEGS
12. $\frac{1}{8}$" STAINLESS STEEL POP RIVETS TO MATCH TRIM
13. MPS PANEL CLIP AND APPROVED FASTENERS WITH PANEL CLIP WITHIN THE LAST 1' OF PANEL
14. MPS METAL PANEL (MP-200 SHOWN)