



# FP-100 Soffit & Wall Panel

- Versatile panel for soffit, fascia, facade, and walls
- Install over solid substrate of open framing (up to 24" o.c.)
- Available flat or with pencil ribs
- Venting: 2 rows of perforations for soffit venting
- Panels expand and contract freely
- Flush seam connection with hidden fasteners
- Roll-formed to exact lengths
- Standard finish is PVDF fluoropolymer coating in 30 standard colors (Custom colors available)
- 35 year finish warranty

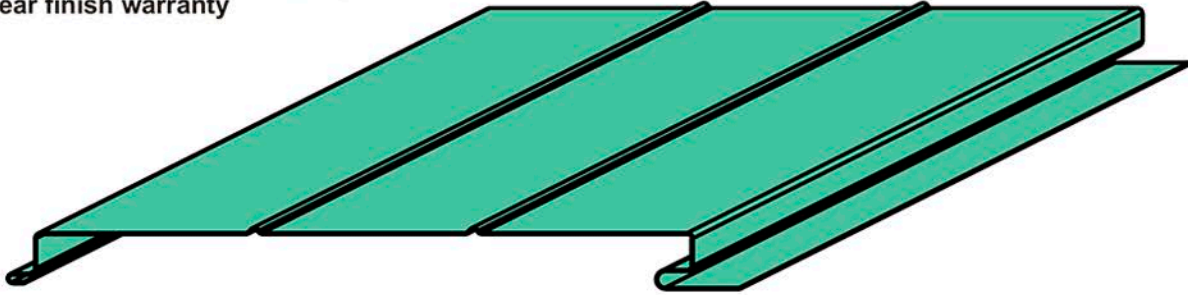


## Panel Profile

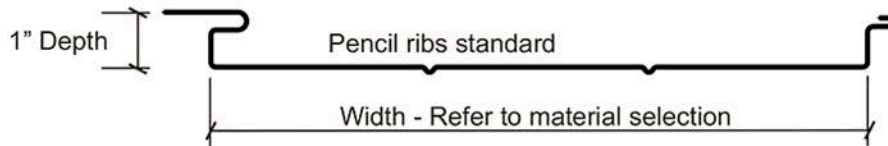

<u>Material</u>	<u>Standard Width</u>	<u>Optional Widths</u>
24 ga. Steel	12"	16", 18"
0.032" Aluminum	12"	

Optional widths require minimum quantities and slightly longer lead times. Other materials and gauges are available. Minimum quantities apply. Custom widths are available. Consult MPSI for costs and lead times.

Oil canning: Metal Panel Systems, Inc. purchases prime commercial grade light gauge metal which is manufactured to all industry accepted tolerances. "Oil canning" is an inherent part of light gauge cold formed panels and is not cause for rejection.

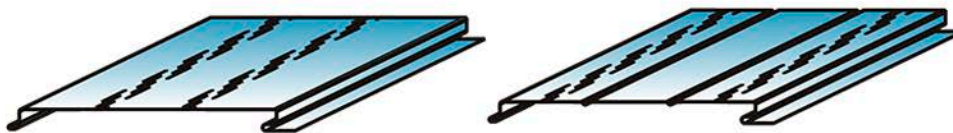

## Vented Profile Options

VENTING: Net free vent area for vented panels (2 rows of perforations) is 6.04 square inches per lineal foot. Option of 3 rows of vents for 9.07 square inches per lineal foot of net free area (aluminum only).



11506 Reading Road, Cincinnati, Ohio 45241-2512

Tel: 800-554-6126, 513-554-6120 Fax: 513-554-6121

[www.metalpanelsystems.com](http://www.metalpanelsystems.com)  
[info@metalpanelsystems.com](mailto:info@metalpanelsystems.com)