Description:	Detail No.:
PEAK DETAIL	MPS-PD1
	Date: 7/21/26
Substrate: SUITABLE SUBSTRATE	

METAL PANEL SYSTEMS
GAUGES ABOVE

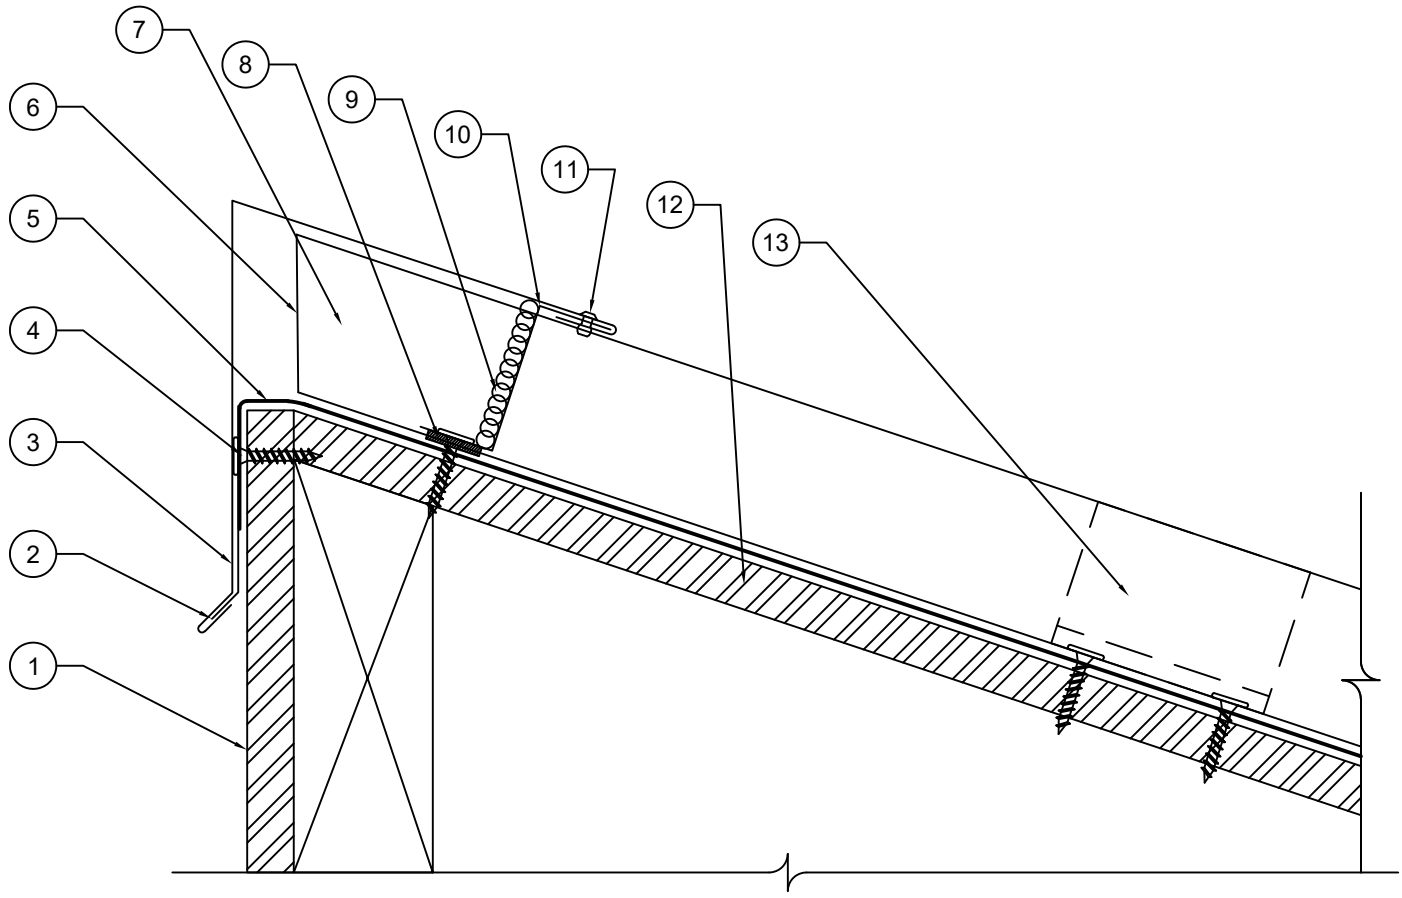

1. EXTERIOR BUILDING WALL NOT BY MPS
2. PEAK CLEAT, FASTENED 12" O.C. WITH MPS APPROVED FASTENERS
3. PEAK CAP , 4" END LAP WITH A CONTINUOUS BEAD ON MPS APPROVED SEALANT IN THE LAP, POP RIVETED TO Z-CLOSURES EVERY 30" O.C.
4. MPS APPROVED FASTENERS (#10 X 1-$\frac{1}{8}$" ULP PANCAKE HEAD WOOD SCREW SHOWN)
5. ONE LAYER OF MPS EPISTIK ALL OVER THE ROOF AND BEHIND ALL METAL FLASHINGS
6. BREAD PAN THE END OF PANEL WITHOUT CUTTING CORNERS
7. MPS METAL PANEL (MP-200 SHOWN)
8. MPS APPROVED BUYTL TAPE CONTINUOUS
9. CONTINUOUS BEAD OF MPS APPROVED SEALANT UP THE VERTICAL LEG OF Z-CLOSURES
10. Z-CLOSURES FIELD CUT SET INTO BUYTL TAPE AND FASTENED 4" O.C. INSTALL MPS APPROVED SEALANT ON THE VERTICAL LEGS OF Z-CLOSURE SEALING TO PANEL LEGS
11. $\frac{1}{8}$" STAINLESS STEEL POP RIVET TO MATCH TRIM
12. SUITABLE DECKING NOT BY MPS
13. MPS PANEL CLIP AND APPROVED FASTENERS WITH PANEL CLIP WITHIN LAST 1' OF PANEL