Description:	Detail No.:
PEAK DETAIL WITH WALL PANEL	MPS-PD2
	Date: 7/21/26
Substrate: SUITABLE SUBSTRATE	

METAL PANEL SYSTEMS
GAUGES ABOVE

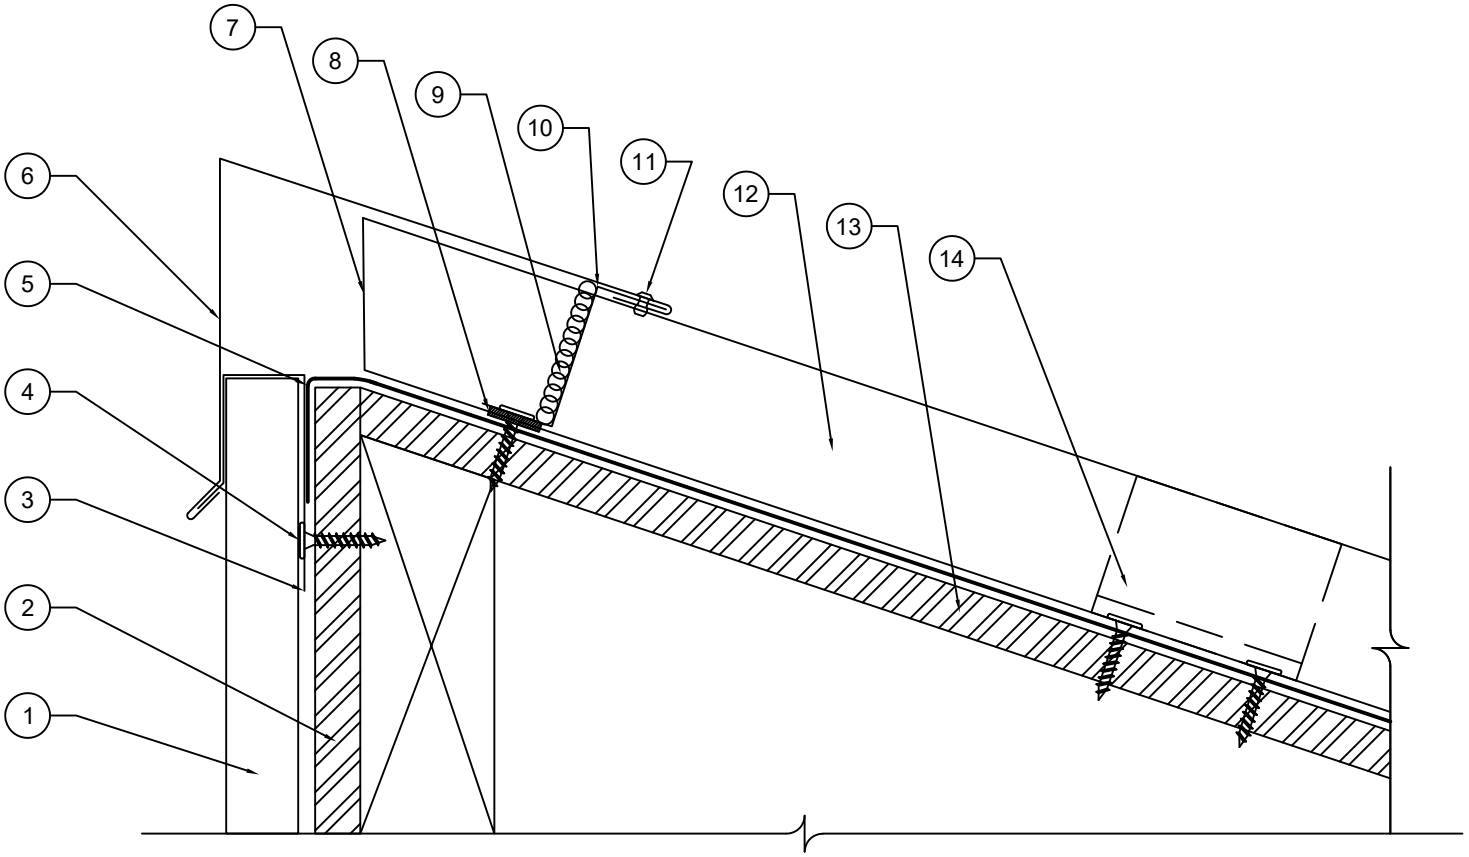

1. MPS VERTICAL WALL PANEL
2. EXTERIOR BUILDING WALL NOT BY MPS
3. J-CHANNEL WITH CLEAT, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED 12" O.C. WITH MPS APPROVED FASTENERS
4. MPS APPROVED FASTENERS (#10 X 1-$\frac{1}{8}$" ULP PANCAKE HEAD WOOD SCREWS)
5. ONE LAYER OF MPS EPISTIK UNDERLAYMENT ALL OVER ROOF AND BEHIND ALL METAL FLASHINGS
6. PEAK FLASHING, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, POP RIVETED TO Z-CLOSURES EVERY 30"
7. BREAD PAN THE END OF PANEL WITHOUT CUTTING CORNERS
8. MPS APPROVED BUYTL TAPE CONTINUOUS
9. CONTINUOUS BEAD OF MPS APPROVED SEALANT UP THE VERTICAL LEG OF Z-CLOSURES
10. Z-CLOSURES FIELD CUT SET INTO BUYTL TAPE AND FASTENED 4" O.C. INSTALL MPS APPROVED SEALANT ON THE VERTICAL LEGS OF Z-CLOSURE SEALING TO PANEL LEGS
11. $\frac{1}{8}$" STAINLESS STEEL POP RIVET TO MATCH TRIM
12. MPS METAL PANEL (MP-200 IS SHOWN)
13. SUITABLE DECKING NOT BY MPS
14. MPS PANEL CLIP AND APPROVED FASTENERS WITH PANEL CLIP WITHIN LAST 1' OF PANEL