Description:	Detail No.:
PEAK AT MEMBRANE ROOF DETAIL	MPS-PD3
	Date: 7/21/26
Substrate: SUITABLE SUBSTRATE	

METAL PANEL SYSTEMS
GAUGES ABOVE

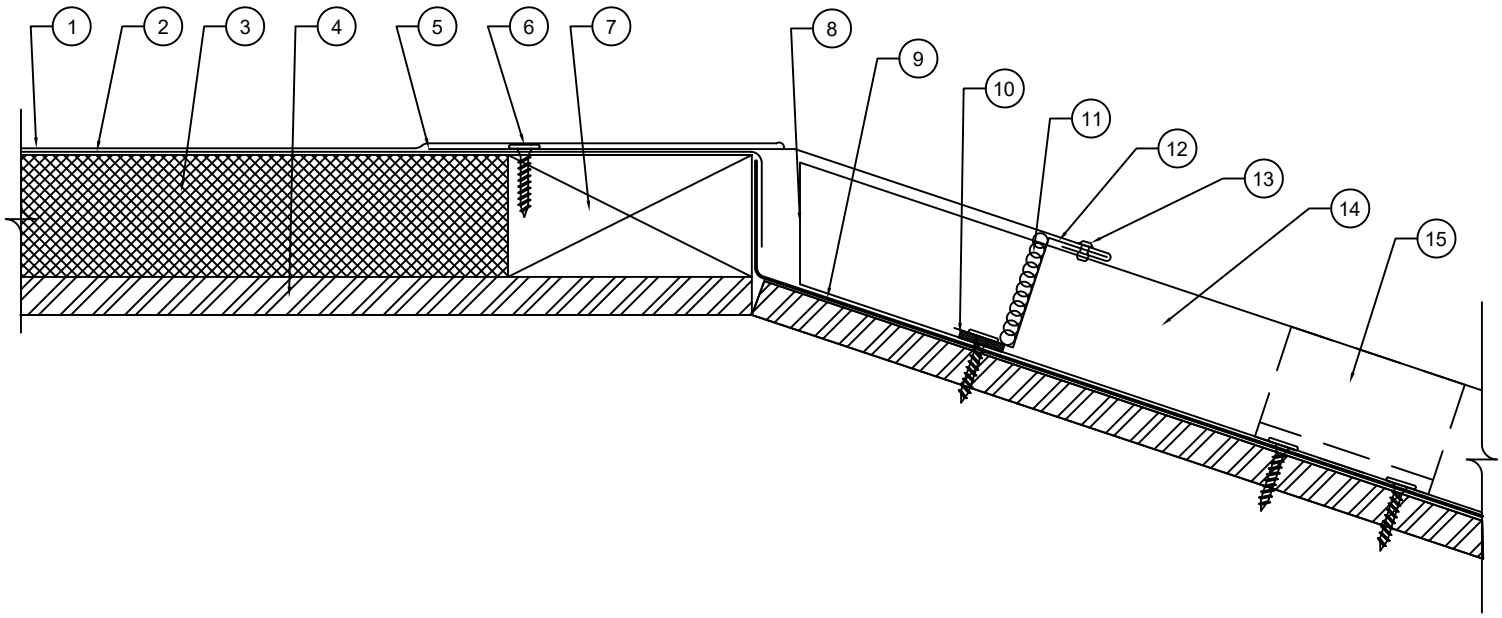

1. STRIP IN TRANSITION PER FLAT ROOF MANUFACTURES DETAILS NOT BY MPS
2. ROOFING MEMBRANE NOT BY MPS
3. RIGID INSULATION NOT BY MPS
4. SUITABLE ROOF DECKING NOT BY MPS
5. TRANSITION FLASHING, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, POP RIVETED TO Z-CLOSURES EVERY 30"O.C.
6. MPS APPROVED FASTENER (#10 X 1-$\frac{1}{8}$" ULP PANCAKE HEAD WOOD SCREW SHOWN)
7. WOOD NAILER NOT BY MPS
8. ONE LAYER OF MPS EPISTIK UNDERLAYMENT ALL OVER THE ROOF AND BEHIND ALL METAL FLASHINGS
9. BREAD PAN THE END OF PANEL WITHOUT CUTTING THE CORNERS
10. MPS APPROVED BUYTL TAPE CONTINUOUS
11. CONTINUOUS BEAD OF MPS APPROVED SEALANT UP THE LEG OF THE Z-CLOSURES
12. Z-CLOSURES FIELD CUT SET INTO BUYTL TAPE AND FASTENED 4" O.C. INSTALL MPS APPROVED SEALANT ON THE VERTICAL LEGS OF Z-CLOSURE SEALING TO PANEL LEGS
13. $\frac{1}{8}$" STAINLESS STEEL POP RIVETS TO MATCH TRIM
14. MPS METAL PANEL (MP-200 SHOWN)
15. MPS PANEL CLIPS AND APPROVED FASTENERS WITH PANEL CLIP WITHIN 1' OF END OF PANEL