Description:	Detail No.:
PEAK DETAIL	MPS-PD4
	Date: 7/21/26
Substrate: SUITABLE SUBSTRATE	

METAL PANEL SYSTEMS
GAUGES ABOVE

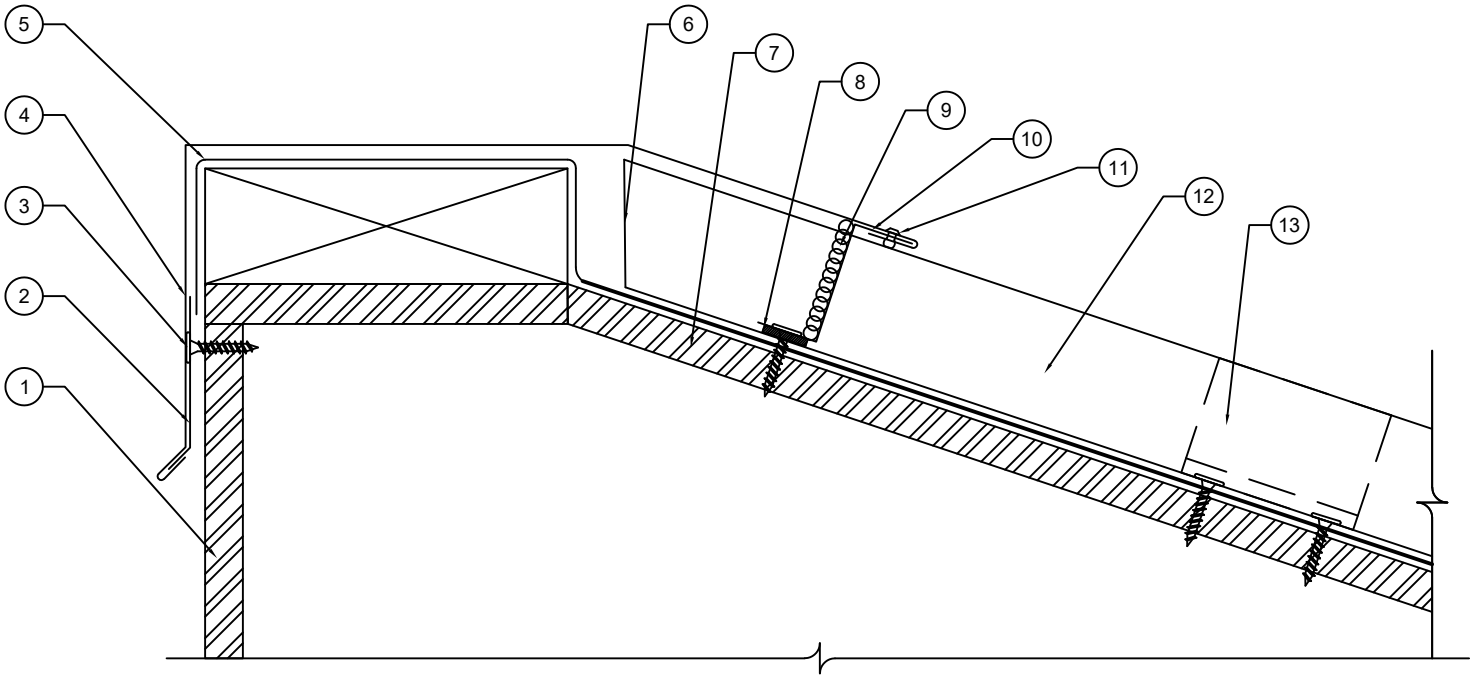

1. EXTERIOR BUILDING WALL NOT BY MPS
2. PEAK CAP CLEAT, FASTENED 12" O.C. WITH MPS APPROVED FASTENERS
3. MPS APPROVED FASTENERS (#10 X 1-$\frac{1}{8}$" ULP PANCAKE HEAD WOOD FASTENERS SHOWN)
4. PEAK CAP, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, POP RIVETED TO Z-CLOSURES EVERY 30" O.C.
5. ONE LAYER OF MPS EPISTIK UNDERLAYMENT ALL OVER ROOF AND BEHIND ALL METAL FLASHINGS
6. BREAD PAN THE END OF PANEL WITH OUT CUTTING CORNERS
7. SUITABLE DECKING NOT BY MPS
8. MPS APPROVED BUYTL TAPE CONTINUOUS
9. CONTINUOUS BEAD OF MPS APPROVED SEALANT UP THE VERTICAL LEG OF Z-CLOSURES
10. Z-CLOSURES FIELD CUT SET INTO BUYTL TAPE AND FASTENED 4" O.C. INSTALL MPS APPROVED SEALANT ON THE VERTICAL LEGS OF Z-CLOSURE SEALING TO PANEL LEGS
11. $\frac{1}{8}$" STAINLESS STEEL POP RIVETS TO MATCH TRIM
12. MPS METAL PANEL (MP-200 IS SHOWN)
13. MPS PANEL CLIP AND APPROVED FASTENERS WITH PANEL CLIP WITHIN LAST 1' OF PANEL