Description:	Detail No.:
RAKE DETAIL	MPS-RD1
	Date: 7/21/26
Substrate: SUITABLE SUBSTRATE	

METAL PANEL SYSTEMS
GAUGES ABOVE

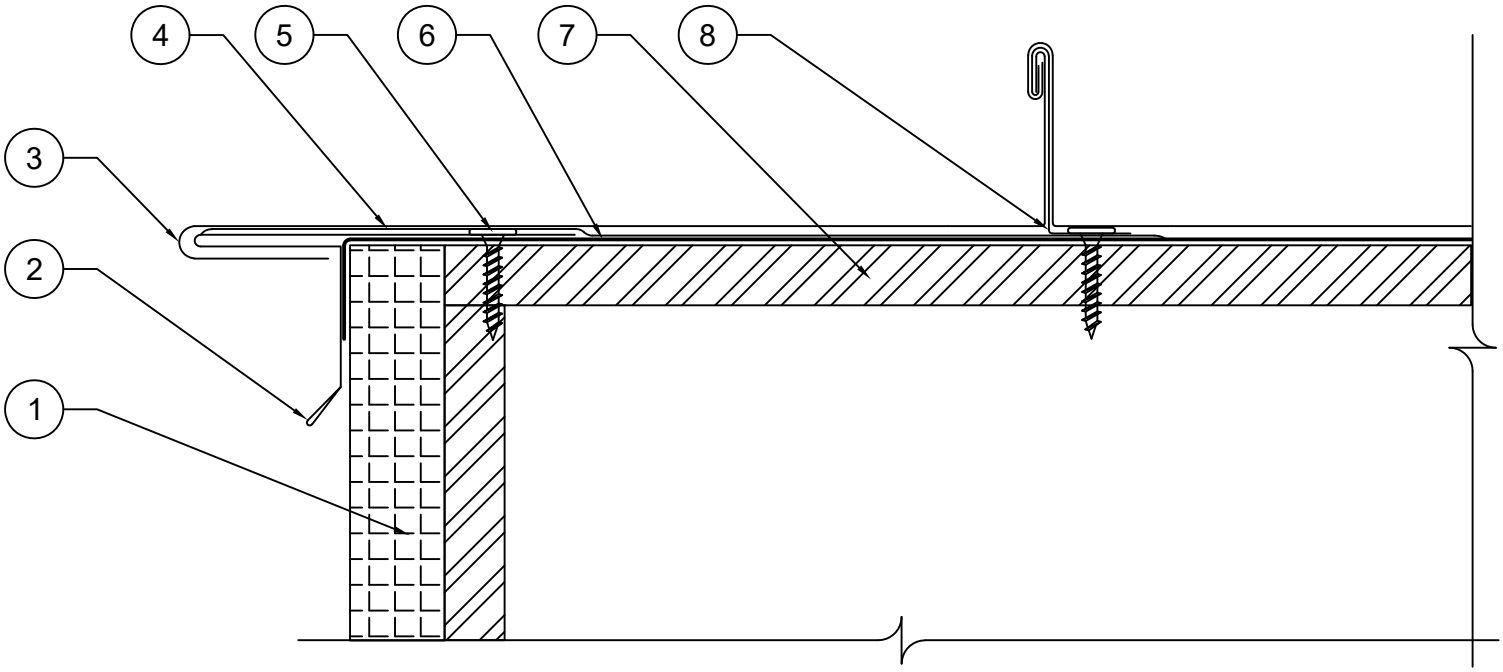

1. EXTERIOR BUILDING WALL NOT BY MPS
2. RAKE, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP,FASTENED AT 6" O.C. WITH MPS APPROVED FASTENERS
3. MPS METAL PANEL(MP-200 IS SHOWN) REMOVE PANEL LEG AND FIELD FORM THE PANEL AROUND RAKE EDGE
4. ADDITIONAL LAYER OF MPS EPISTIK UNDERLAYMENT AT MINIMUM OF 9" T0 STRIP IN RAKE
5. MPS APPROVED FASTENERS(#10 X 1-$\frac{1}{8}$" ULP PANCAKE HEAD WOOD SCREW IS SHOWN)
6. ONE LAYER OF MPS EPISTIK UNDERLAYMENT ALL OVER ROOF AND BEHIND ALL METAL FLASHINGS
7. SUITABLE DECKING NOT BY MPS
8. MPS PANEL CLIP AND APPROVED FASTENERS (MP-200 CLIP IS SHOWN)