Description:	Detail No.:
RAKE WITH FASCIA DETAIL	MPS-RD2
	Date: 7/21/26
Substrate: SUITABLE SUBSTRATE	

METAL PANEL SYSTEMS
GAUGES ABOVE

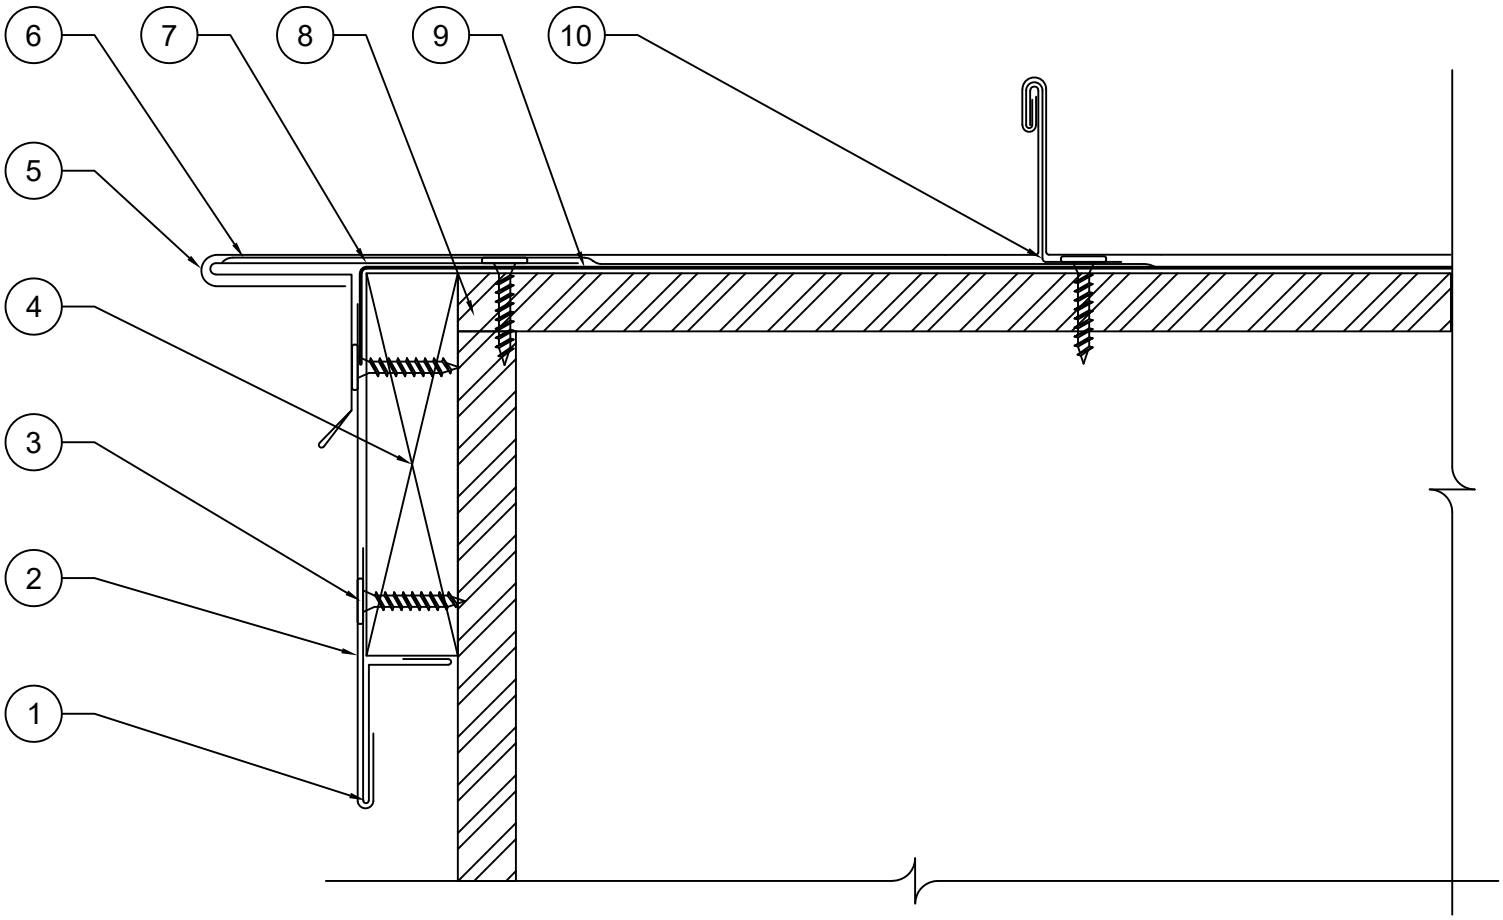

1. FASCIA CLEAT, FASTENED AT 12" O.C. WITH MPS APPROVED FASTENERS
2. FASCIA COVER, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED AT 12" O.C. WITH APPROVED FASTENERS
3. MPS APPROVED FASTENERS(#10 X 1-$\frac{1}{8}$" ULP PANCAKE HEAD WOOD FASTENER IS SHOWN)
4. FASCIA BOARD NOT BY MPS
5. MPS METAL PANEL (MP-200 IS SHOWN) REMOVE PANEL LEG AND FIELD FORM THE PANEL AROUND RAKE EDGE
6. AN ADDITIONAL LAYER OF MPS EPISTIK UNDERLAYMENT AT MINIMUM OF 9" TO STRIP IN RAKE EDGE
7. RAKE, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED AT 6" O.C. WITH MPS APPROVED FASTENERS
8. SUITABLE DECKING NOT BY MPS
9. ONE LAYER OF MPS EPISTIK UNDERLAYMENT ALL OVER ROOF AND BEHIND ALL METAL FLASHINGS
10. MPS PANEL CLIP AND MPS APPROVED FASTENERS(MP-200 CLIP IS SHOWN)