Description:	Detail No.:
RAKE WITH FASCIA AND SOFFIT DETAIL	MPS-RD3
	Date: 7/21/26
Substrate: SUITABLE SUBSTRATE	

METAL PANEL SYSTEMS
GAUGES ABOVE

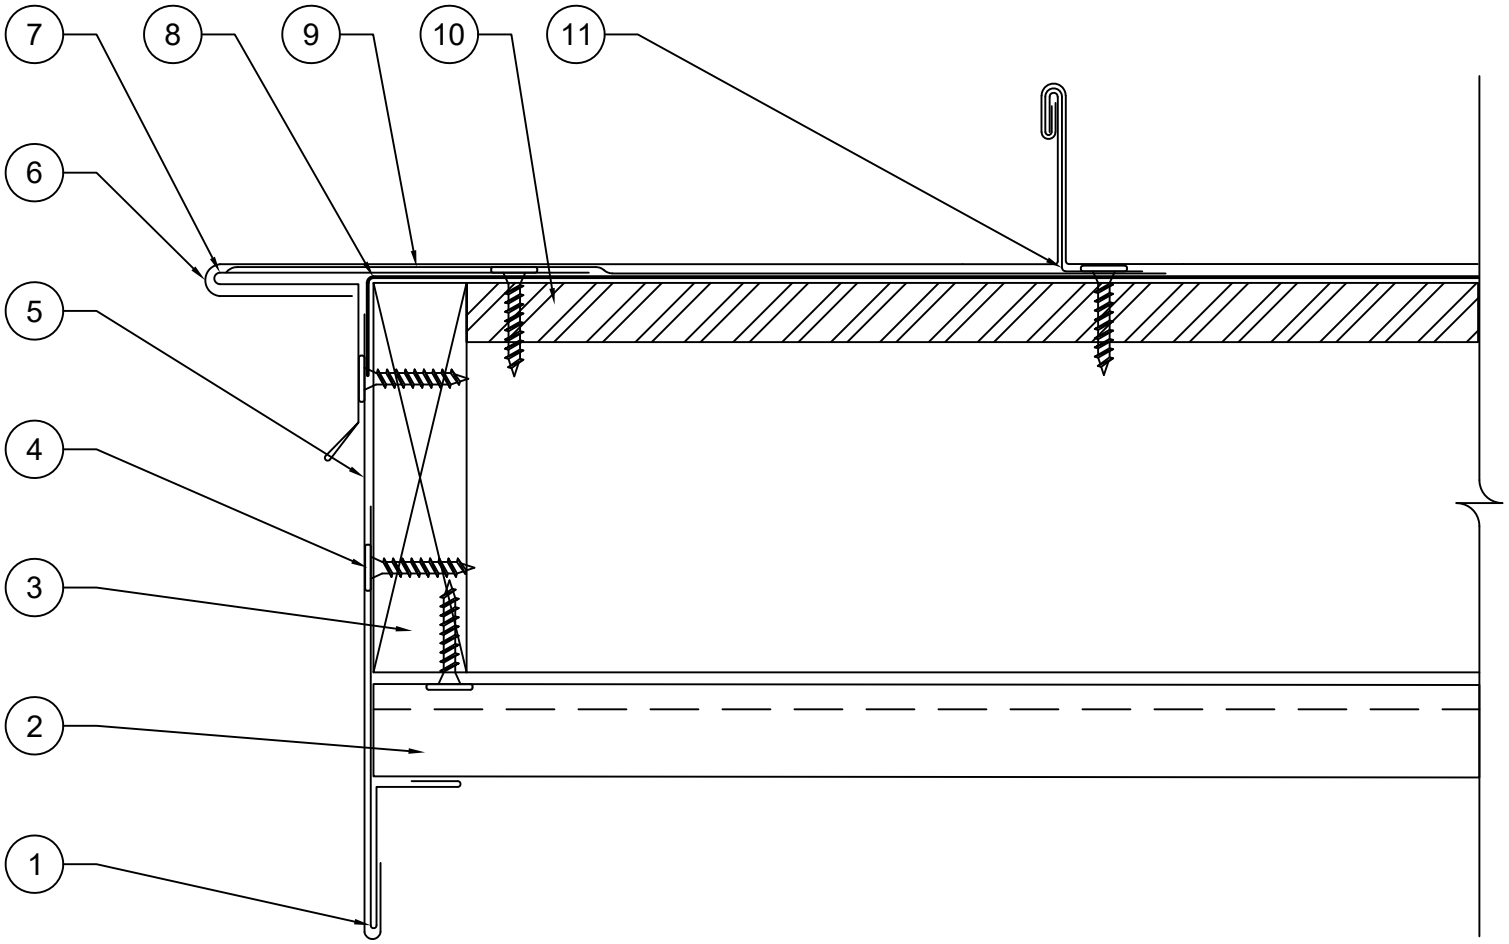

1. FASCIA CLEAT, FASTENED 12" O.C. WITH MPS APPROVED FASTENERS
2. MPS FLUSH PANEL, FASTENED THROUGH FLANGE AT 24" O.C. WITH MPS APPROVED FASTENERS
3. FASCIA WOOD BLOCKING NOT BY MPS
4. MPS APPROVED FASTENERS(#10 X 1-$\frac{1}{8}$" ULP PANCAKE HEAD WOOD FASTENERS)
5. FASCIA COVER, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED 12" O.C. WITH MPS APPROVED FASTENERS
6. MPS METAL PANEL(MP-200 IS SHOWN) REMOVE PANEL LEG AND FIELD FORM THE PANEL AROUND RAKE EDGE
7. RAKE, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED 6" O.C. WITH MPS APPROVED FASTENERS
8. ONE LAYER OF MPS EPISTIK UNDERLAYMENT ALL OVER ROOF AND BEHIND ALL METAL FLASHINGS
9. AN ADDITIONAL LAYER OF MPS EPISTIK UNDERLAYMENT AT MINIMUM OF 9" TO STRIP IN RAKE EDGE
10. SUITABLE DECKING NOT BY MPS
11. MPS PANEL CLIP AND APPROVED FASTENERS (MP-200 CLIP IS SHOWN)