Description:	Detail No.:
RAKE WITH FASCIA AND SOFFIT DETAIL	MPS-RD4
	Date: 7/21/26
Substrate: SUITABLE SUBSTRATE	

METAL PANEL SYSTEMS
GAUGES ABOVE

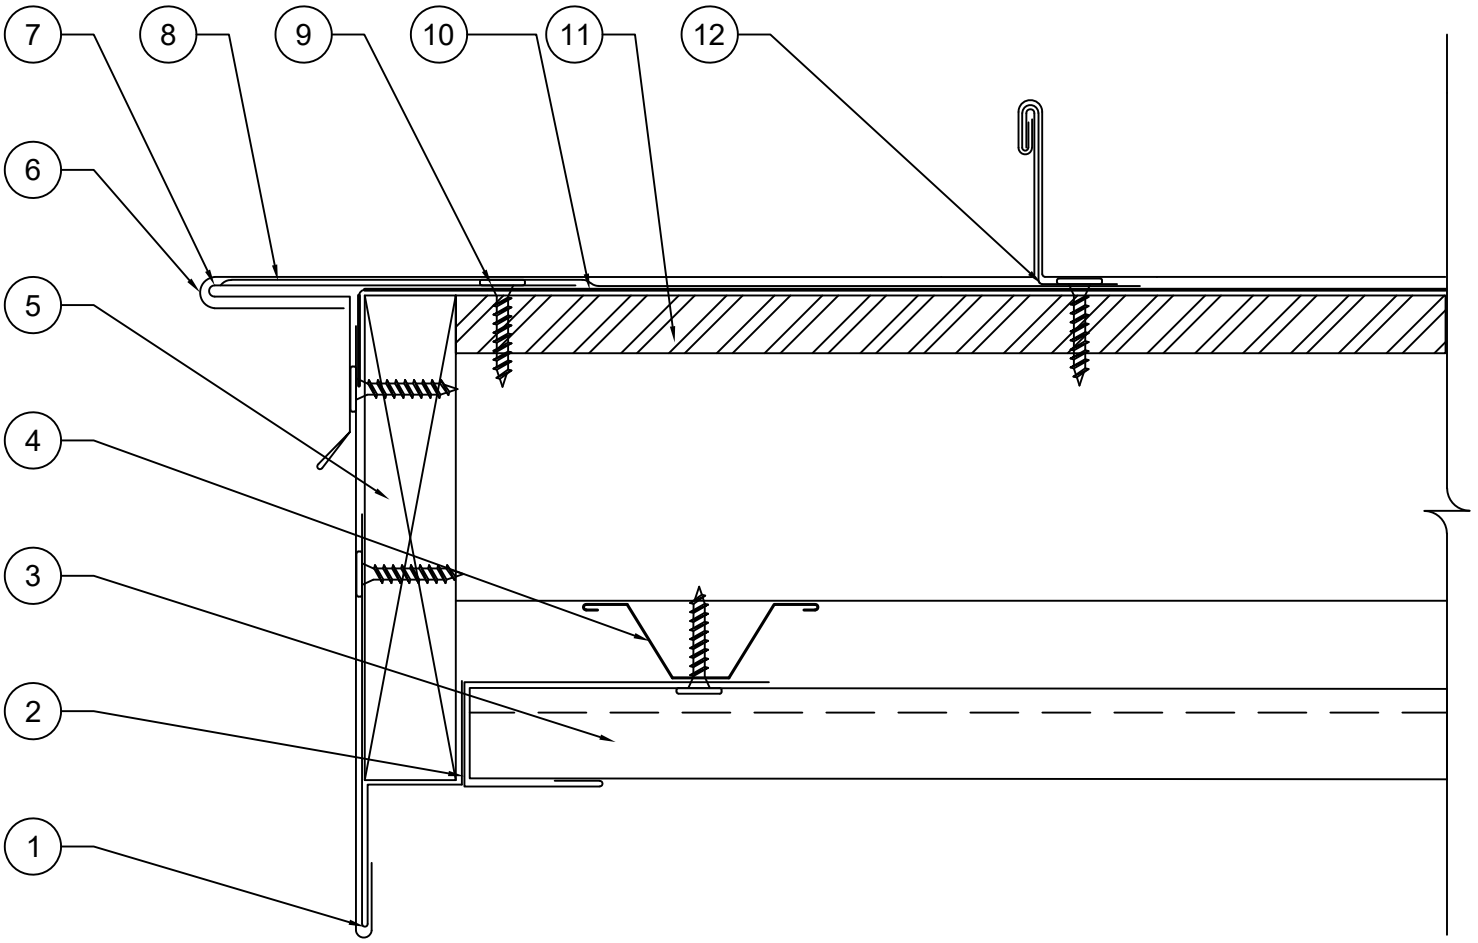

1. FASCIA CLEAT, FASTEN 12" O.C. WITH MPS APPROVED FASTENERS
2. J-CHANNEL, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED 12" O.C. WITH MPS APPROVED FASTENERS
3. MPS FLUSH PANEL, FASTENED THROUGH FLANGE AT 24" O.C. WITH MPS APPROVED FASTENERS
4. HAT CHANNEL NOT BY MPS
5. FASCIA WOOD BLOCKING NOT BY MPS
6. MPS METAL PANEL(MP-200 IS SHOWN) REMOVE PANEL LEG AND FIELD FORM THE PANEL AROUND RAKE EDGE
7. RAKE, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED 6" O.C. WITH MPS APPROVED FASTENERS
8. AN ADDITIONAL LAYER OF MPS EPISTIK UNDERLAYMENT AT MINIMUM OF 9" TO STRIP IN RAKE EDGE
9. MPS APPROVED FASTENERS(#10 X 1-$\frac{1}{8}$" ULP PANCAKE HEAD WOOD FASTENER IS SHOWN)
10. ON LAYER OF MPS EPISTIK UNDERLAYMENT ALL OVER ROOF AND BEHIND ALL METAL FLASHINGS
11. SUITABLE DECKING NOT BY MPS
12. MPS PANEL CLIPS AND APPROVED FASTENERS (MP-200 CLIP IS SHOWN)