Description:	Detail No.:
VALLEY DETAIL	MPS-VD2
	Date: 7/21/26
Substrate: SUITABLE SUBSTRATE	

METAL PANEL SYSTEMS
GAUGES ABOVE

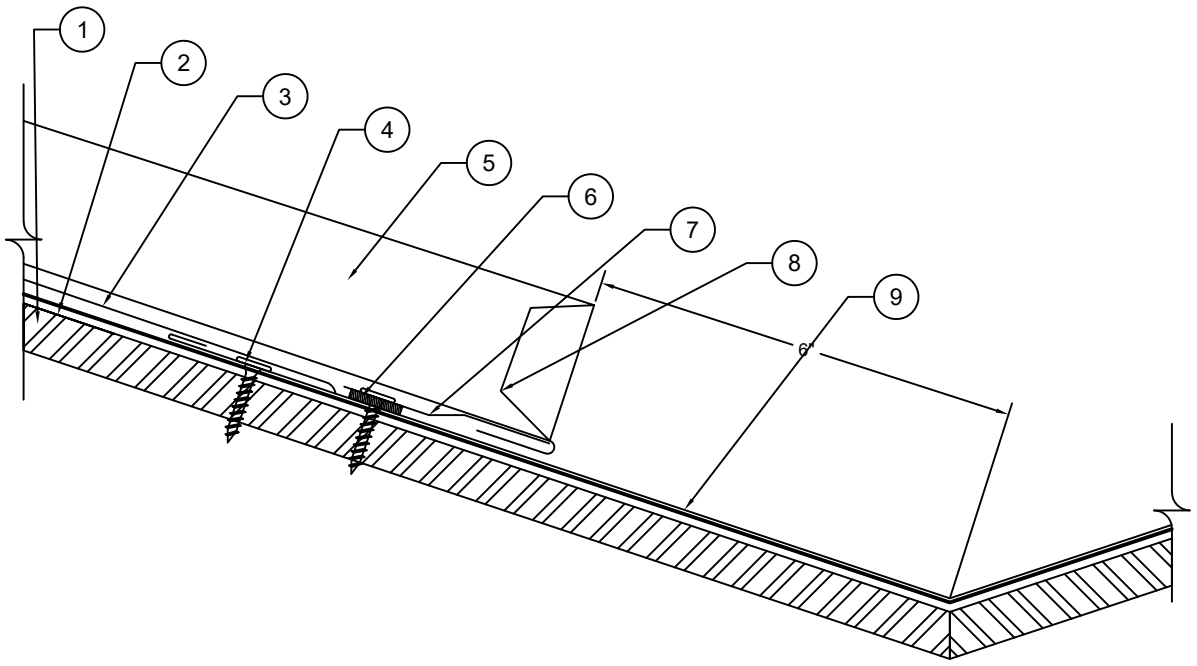

1. SUITABLE DECKING NOT BY MPS
2. ONE LAYER OF MPS EPISTIK UNDERLAYMENT ALL OVER ROOF AND BEHIND ALL METAL FLASHINGS
3. AN ADDITIONAL LAYER OF MPS EPISTIK UNDERLAYMENT AT A MINIMUM OF 9" TO STRIP IN VALLEY FLASHING
4. MPS APPROVED FASTENERS(#10 X 1-$\frac{1}{8}$" ULP PANCAKE HEAD WOOD FASTENERS IS SHOWN)
5. MPS METAL PANEL(MP-200 IS SHOWN) CUT BACK PANEL LEG AND FORM PANEL AROUND OFFSET CLEAT
6. MPS APPROVED BUYTL TAPE CONTINUOUS
7. OFFSET CLEAT,4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED 12" O.C. WITH MPS APPROVED FASTENERS
8. FOLD END OF PANEL SEAM AROUND IN DIRECTION OF SLOPE
9. VALLEY FLASHING, 12" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP FASTENED EVERY 12" O.C. WITH MPS APPROVED FASTENERS