Description:	Detail No.:
VENTED HIGH WALL DETAIL	MPS-VHWD1
	Date: 7/21/26
Substrate: SUITABLE SUBSTRATE	

METAL PANEL SYSTEMS
GAUGES ABOVE

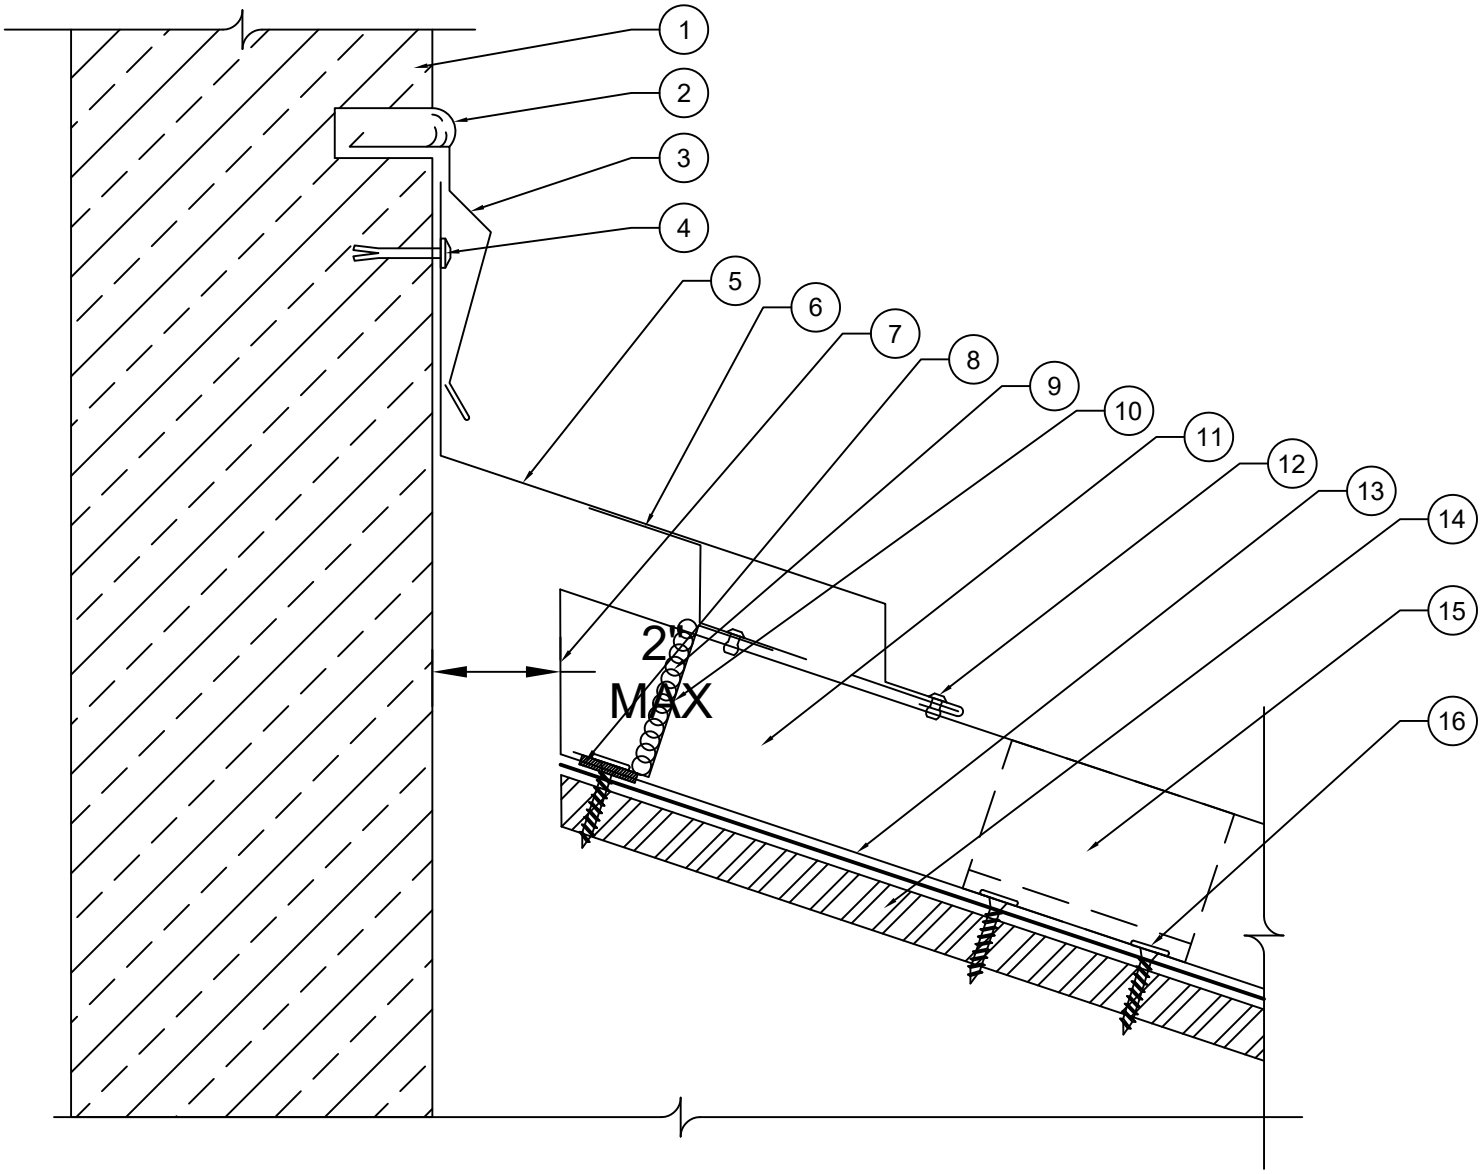

1. MASONRY WALL NOT BUY MPS
2. CONTINUOUS BEAD OF MPS APPROVED SEALANT
3. REGLET FLASHING, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT
4. MASONRY DRIVE PIN
5. VENTED HIGH WALL FLASHING, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, POP RIVETED TO PERFORATED CLEAT EVERY 30" O.C.
6. PERFORATED CLEAT, POP RIVET TO Z-CLOSURES EVERY 24" O.C.
7. BREAD PAN AT END OF PANEL WITHOUT CUTTING CORNERS
8. MPS APPROVED BUYTL TAPE CONTINUOUS
9. CONTINUOUS BEAD OF MPS APPROVED SEALANT UP THE VERTICAL LEG OF Z-CLOSURES
10. Z-CLOSURES FIELD CUT SET INTO BUYTL TAPE AND FASTENED 4" O.C. INSTALL MPS APPROVED SEALANT ON THE VERTICAL LEGS OF Z-CLOSURE SEALING TO PANEL LEGS
11. MPS METAL PANEL (MP-200 IS SHOWN)
12. $\frac{1}{8}$" STAINLESS STEEL POP RIVET TO MATCH TRIM
13. ONE LAYER OF MPS EPISTIK ALL OVER THE ROOF AND BEHIND ALL METAL FLASHINGS
14. SUITABLE DECKING NOT BY MPS
15. MPS METAL PANEL CLIPS AND APPROVED FASTENERS WITHIN THE LAST 1' OF PANEL
16. MPS APPROVED FASTENERS(#10X 1-$\frac{1}{8}$" ULP PANCAKE HEAD WOOD FASTENERS)