

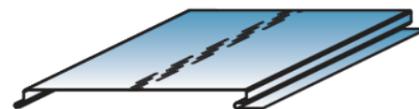



The FP-100 Panel is for soffit, wall, and liner applications. It can be installed over solid substrate or on open framing (36" o.c.). Ideal applications include vertical fascias, soffit, equipment screen, and mansard walls. The FP-100 Panel is available with perforated vent strips for soffit vent application.

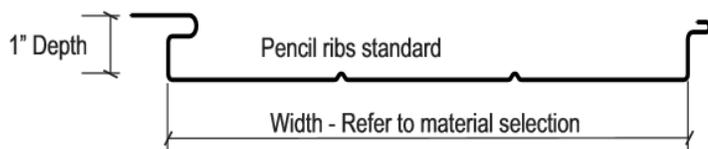


Single row of venting

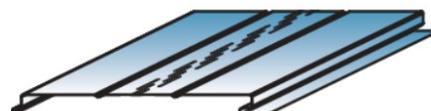


Single row of venting, 2 pencil ribs

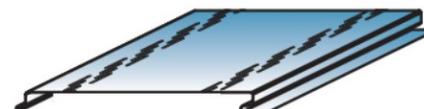

2 rows of venting

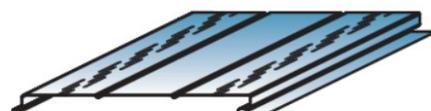

2 rows of venting, 2 pencil ribs

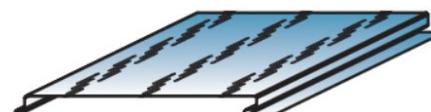

3 rows of venting
(aluminum only)



3 rows of venting, 2 pencil ribs
(aluminum only)

- Versatile panel for soffit, fascia, façade, and walls.
- Install over solid substrate or open framing (up to 36" o.c.).
- Available smooth or with pencil ribs.
- Venting: two rows of perforations for soffit venting.
- Panels expand and contract freely.
- Flush seam connections with hidden fasteners.
- Roll-formed to exact lengths.
- Standard finish is PVDF fluoropolymer coating in 30 standard colors (custom colors available).
- 35 Year finish warranty.

MATERIAL	STANDARD WIDTHS	OPTIONAL WIDTHS
24 ga. Steel	12"	16", 18"
22 ga. Steel	12"	
.032" Aluminum	12"	
.040" Aluminum	12"	

VENTING: Net free vent area for vented panels (2 rows of perforations) is 6.04 square inches per lineal foot.
Option of 3 rows of vents for 9.07 square inches per lineal foot of net free area (aluminum only).
SETUP FEE: 2 rows of vents is our standard, 1 & 3 rows venting options a setup fee will apply.

