
METAL PANEL SYSTEMS

MOC2 COPING

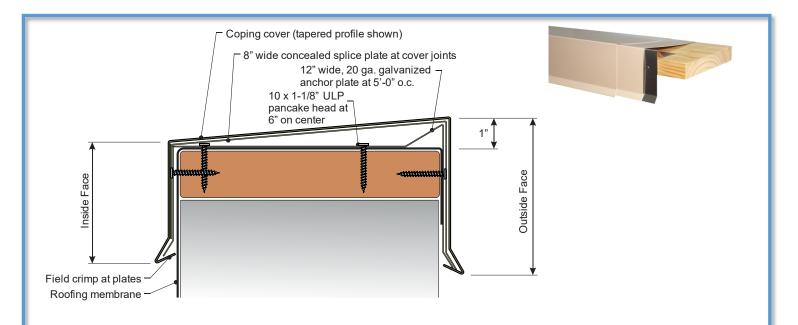

- CrimpLock installation to 20 ga. Galvanized pre-punched anchor plates at 5'-0" o.c.
- The CrimpLock installation eliminates exposed fasteners.
- Concealed splice plates.
- Fabricated for wall widths from 6" to 24" wide.
- Standard finish is PVDF fluoropolymer coating in 30 standard and metallic colors.
- 20 year finish warranty.
- Available with factory mitered corners, transitions, and end caps.

MATERIAL OPTIONS

24 ga. (0.63 mm) galvalumesteel 22 ga. (0.76 mm) galvalume steel

24 ga. (0.063 mm) stainless steel

.032" (0.8 mm) aluminum

.040" (1.0 mm) aluminum

.050" (1.2 mm) aluminum

.063" (1.5 mm) aluminum

FINISH OPTIONS

Standard Kynar 500 colors

(see color chart for availability)

Custom Kynar colors

Plain galvanized steel or "paintgrip"

Mill finish aluminum

Anodized aluminum

2B finish stainless

