



EDGESHIELD FASCIA

Edge Metal Series

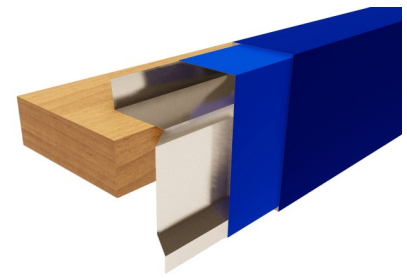

DIAGRAM

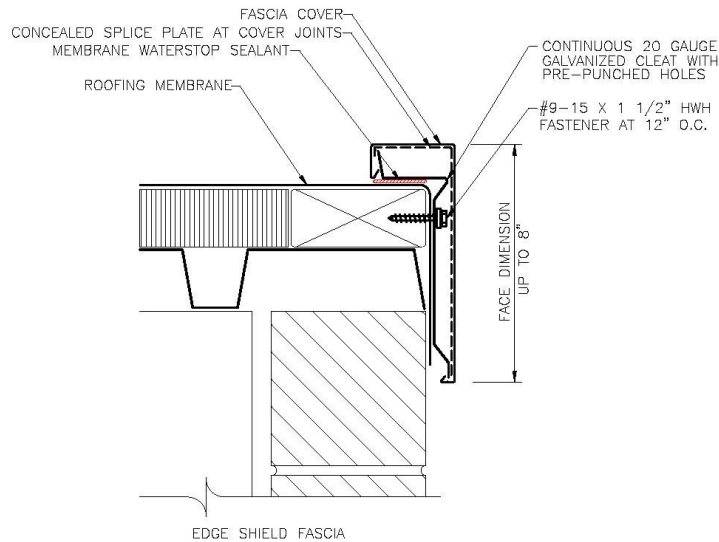

| Material Options |
|-----------------------------------|
| 24 ga. (0.63 mm) galvalume steel |
| 22 ga. (0.76 mm) galvalume steel |
| 24 ga. (0.063 mm) stainless steel |
| .032" (0.8 mm) aluminum |
| .040" (1.0 mm) aluminum |
| .050" (1.2 mm) aluminum |
| .063" (1.5 mm) aluminum |



International Building Code Requirement: 2003 IBC-1504.5: "Edge securement for low-slope roofs. Low slope membrane roof systems metal edge securement, except gutters, installed in accordance with Section 1507, shall be designated in accordance with ANSI/SPRI ES-1, except the basic wind speed shall be determined from Figure 1609."

| Material Options |
|--|
| Standard Kynar 500 colors (see color chart for availability) |
| Custom Kynar colors |
| Plain galvanized steel or "paintgrip" |
| Mill finish aluminum |
| Anodized aluminum |
| 2B finish stainless |

PRODUCT FEATURES

- For single ply roofing systems including EPDM, PVC, and TPO
- Fast installation – Strip-in of field membrane sheet is not required
- Eliminates water line membrane penetrations at the perimeter of the roof
- Installation with continuous 20 gauge galvanized cleat
- Pre-punched holes for proper fastener placement
- Concealed splice plates
- Standard Kynar 500 finish
- 35 year finish warranty