



EDGESHIELD FASCIA

Edge Metal Series

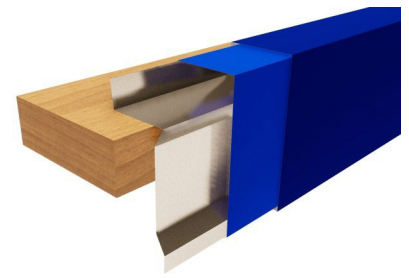

DIAGRAM

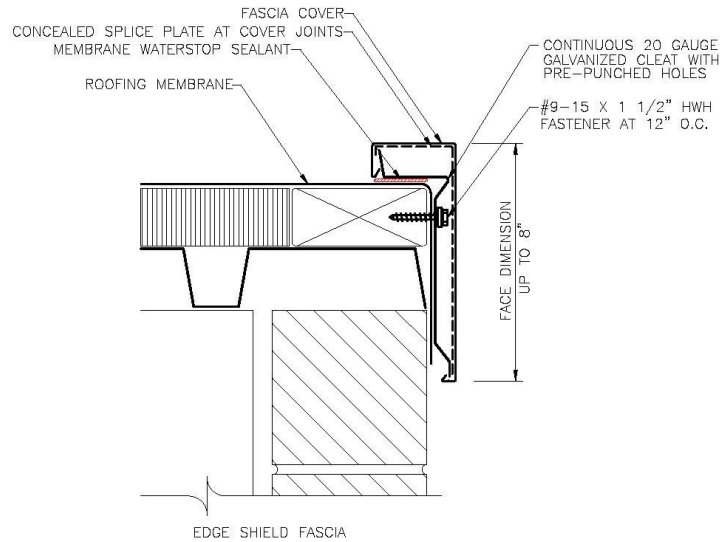

Material Options
24 ga. (0.63 mm) galvalume steel
22 ga. (0.76 mm) galvalume steel
24 ga. (0.063 mm) stainless steel
.032" (0.8 mm) aluminum
.040" (1.0 mm) aluminum
.050" (1.2 mm) aluminum
.063" (1.5 mm) aluminum



ES-1 TESTED

International Building Code Requirement: 2003 IBC-1504.5: "Edge securement for low-slope roofs. Low slope membrane roof systems metal edge securement, except gutters, installed in accordance with Section 1507, shall be designated in accordance with ANSI/SPRI ES-1, except the basic wind speed shall be determined from Figure 1609."

Material Options
Standard Kynar 500 colors (see color chart for availability)
Custom Kynar colors
Plain galvanized steel or "paintgrip"
Mill finish aluminum
Anodized aluminum
2B finish stainless

*Aluminum & Copper available in limited quantities, please call for further availability

PRODUCT FEATURES

- For single ply roofing systems including EPDM, PVC, and TPO
- Fast installation – Strip-in of field membrane sheet is not required
- Eliminates water line membrane penetrations at the perimeter of the roof
- Installation with continuous 20 gauge galvanized cleat
- Pre-punched holes for proper fastener placement
- Concealed splice plates
- Standard Kynar 500 finish
- 35 year finish warranty