FP-150 PANEL

Flush Seam Series

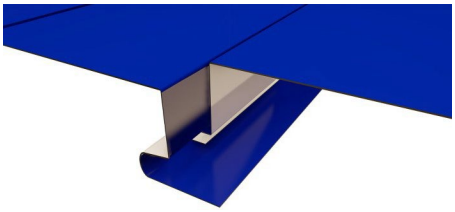

OVERVIEW

The FP-150 Panel is for soffit, wall, and liner applications. It can be installed over solid substrate or on open framing (36" o.c.). Ideal applications include vertical fascias, soffit, equipment screen, and mansard walls. The FP-150 Panel is available with perforated vent strips for soffit vent application

DIAGRAMS



SMOOTH



2 PENCIL/V-RIBS



2 ROWS OF VENTING



2 ROWS OF VENTING, 2 PENCIL/V-RIBS

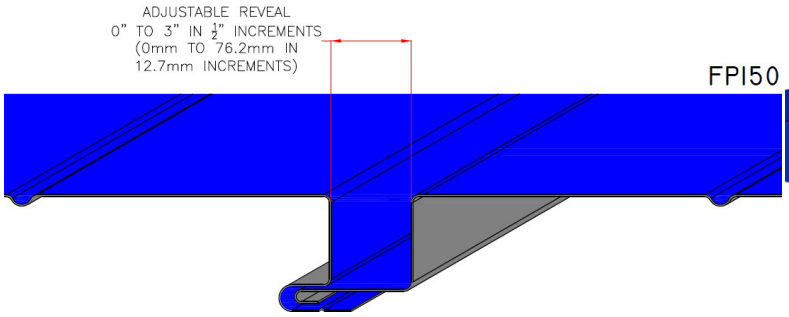

FPI50

MATERIAL	MIN. PAN WIDTHS *excludes reveal*	REVEAL WIDTHS	OPTIONAL WIDTHS *excludes reveal*
24 ga. Steel	12"	0" - 3"	15", 17", 19"
22 ga. Steel	12"	0" - 3"	15", 17", 19"
.032" Aluminum	12"	0" - 3"	
.040" Aluminum	12"	0" - 3"	

*Aluminum & Copper available in limited quantities, please call for further availability

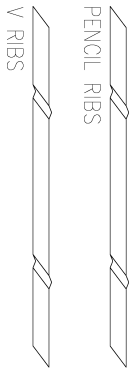

PRODUCT FEATURES

- Versatile panel for soffit, fascia, facade, and walls
- Install over solid substrate or open framing (up to 36" o.c.)
- Available smooth, pencil rib, or v-rib
- Panels expand and contract freely
- Flush seam connections with hidden fasteners
- Roll-formed to exact lengths
- Net free vent area for vented panels (2 rows of perforations) up to 6.04 square inches per lineal foot
- Two rows of vents are standard
- Ventilation not available in 22 ga.

© 2026 Metal Panel Systems