Description:	Detail No.:
LOW WALL DETAIL	MPS-LWD1
	Date: 7/21/26
Substrate: SUITABLE SUBSTRATE	

METAL PANEL SYSTEMS
GAUGES ABOVE

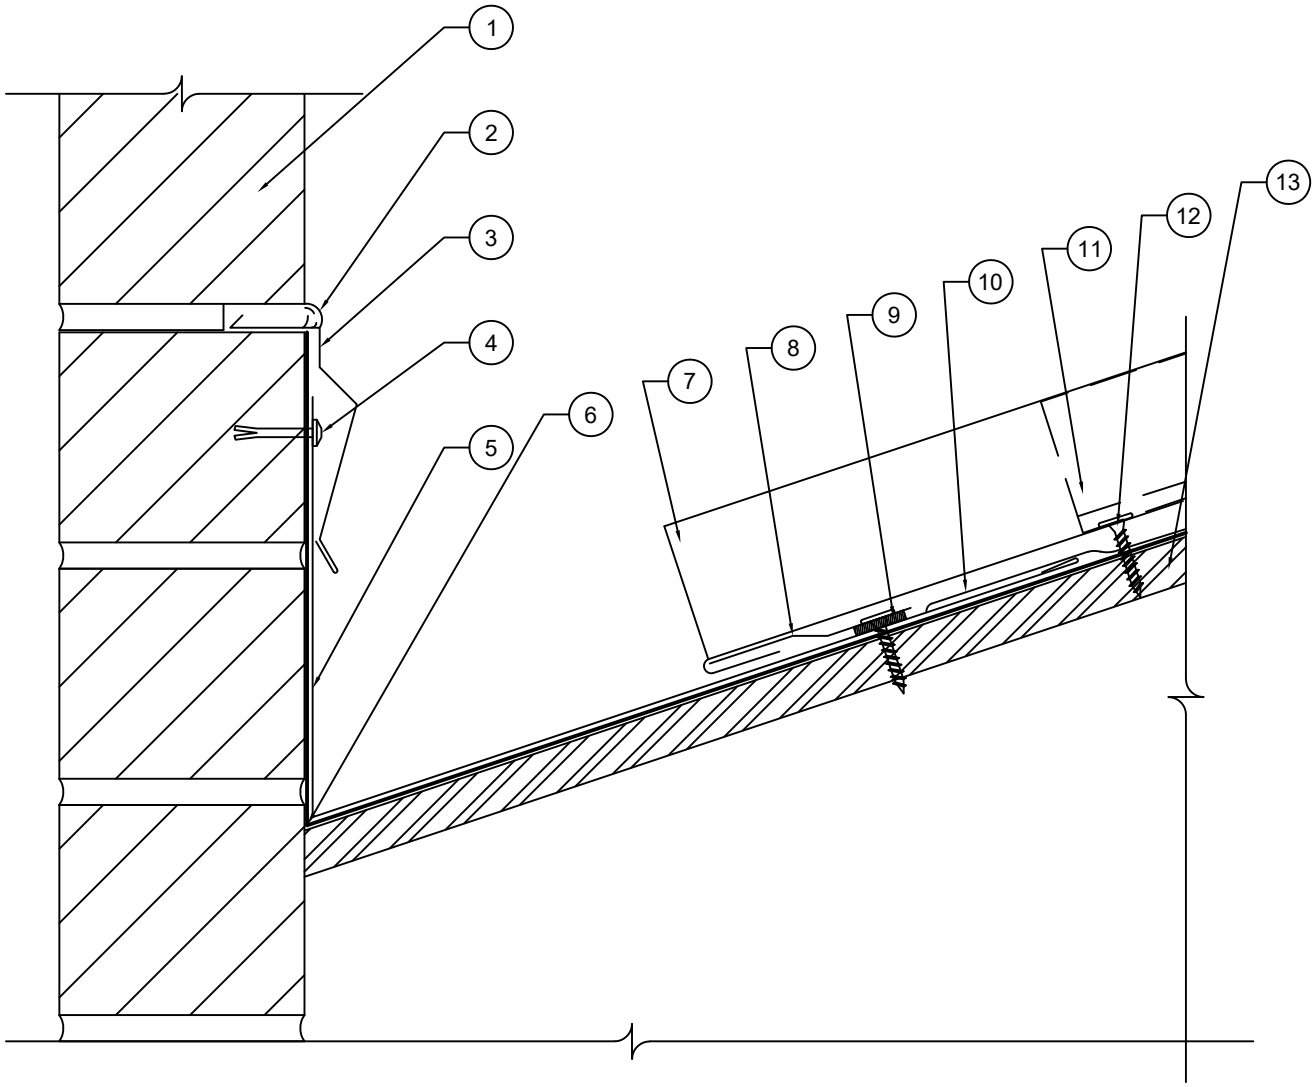

1. BRICK FACADE NOT BY MPS
2. CONTINUOUS BEAD OF MPS APPROVED SEALANT
3. REGLET FLASHING, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT
4. MASONRY DRIVE PIN
5. LOW WALL FLASHING, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP FASTENED AT TOP WITH A MASONRY DRIVE PIN AND BOTTOM SIDE WITH A MPS APPROVED WOOD FASTENERS EVERY 12" O.C.
6. ONE LAYER OF MPS EPISTIK UNDERLAYMENT ALL OVER ROOF AND BEHIND ALL METAL FLASHINGS
7. MPS METAL PANEL(MP-200 IS SHOWN) CUT BACK PANEL LEG AND FORM PANEL AROUND OFFSET CLEAT
8. OFFSET CLEAT,4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED 12" O.C. WITH MPS APPROVED FASTENERS
9. MPS APPROVED BUYTL TAPE CONTINUOUS
10. AN ADDITIONAL LAYER OF MPS EPISTIK UNDERLAYMENT AT A MINIMUM OF 9" TO STRIP IN VALLEY FLASHING
11. MPS PANEL CLIP AND APPROVED FASTENERS(MP-200 CLIP IS SHOWN)
12. MPS APPROVED FASTENERS(#10 X 1-$\frac{1}{8}$" ULP PANCAKE HEAD WOOD FASTENERS IS SHOWN)
13. SUITABLE DECKING NOT BY MPS