
MP - Gravel Stop Fascia

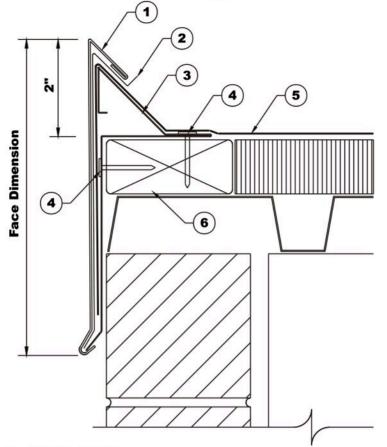

Type	Face Dim
GSF-550	5-1/2"
GSF-650	6-1/2"
GSF-750	7-1/2"
GSF-850	8-1/2"
GSF-950	9-1/2"

- 1 FASCIA COVER
- 2 6" CONCEALED SPLICE PLATE AT JOINTS
- 3 CONTINUOUS 24 GA. GALVANIZED STEEL SPRING LOCK CANT
- 4 MINIMUM 1-1/2" GALVANIZED ROOFING NAIL AT 12" ON CENTER STAGGERED
- 5 ROOFING MEMBRANE
- 6 CONTINUOUS WOOD NAILER

The MP - Gravel Stop Fascia provides a beautiful accent to to single-ply roof systems. This cost saving design eliminates the labor intensive splice lap typical of standard gravel stop details. The integrity of the membrane is maintained by means of a spring lock cant which eliminates the need to fasten through the membrane at roof surface.

SUGGESTED SPECIFICATION

The fascia shall be MP-Gravel Stop Fascia System as manufactured by Metal Panel Systems, Inc. The cover shall be (0.050", 0.063" aluminum or 24 gauge galvanized steel) in 10'-0" lengths with 6" wide concealed splice plates at joints. The support shall be continuous 24 gauge galvanized spring lock cant. All exposed metal shall have a _____ (see finishes available below)

finish.

AVAILABLE FINISHES

- Kynar 500 colors (see color chart)
- Mill
- "Paintgrip" (steel only)
- Anodized (aluminum only)

TOLL-FREE 800-554-6126 513-554-6120 FAX 513-554-6121

Metal Panel Systems, Inc. 11506 Reading Road, Cincinnati, Ohio 45241-2512 Date 01/07

Page GSF01