Description:	Detail No.:
RIDGE TERMINATION DETAIL	MPS-RT2
	Date: 7/21/26
Substrate: SUITABLE SUBSTRATE	

METAL PANEL SYSTEMS
GAUGES ABOVE

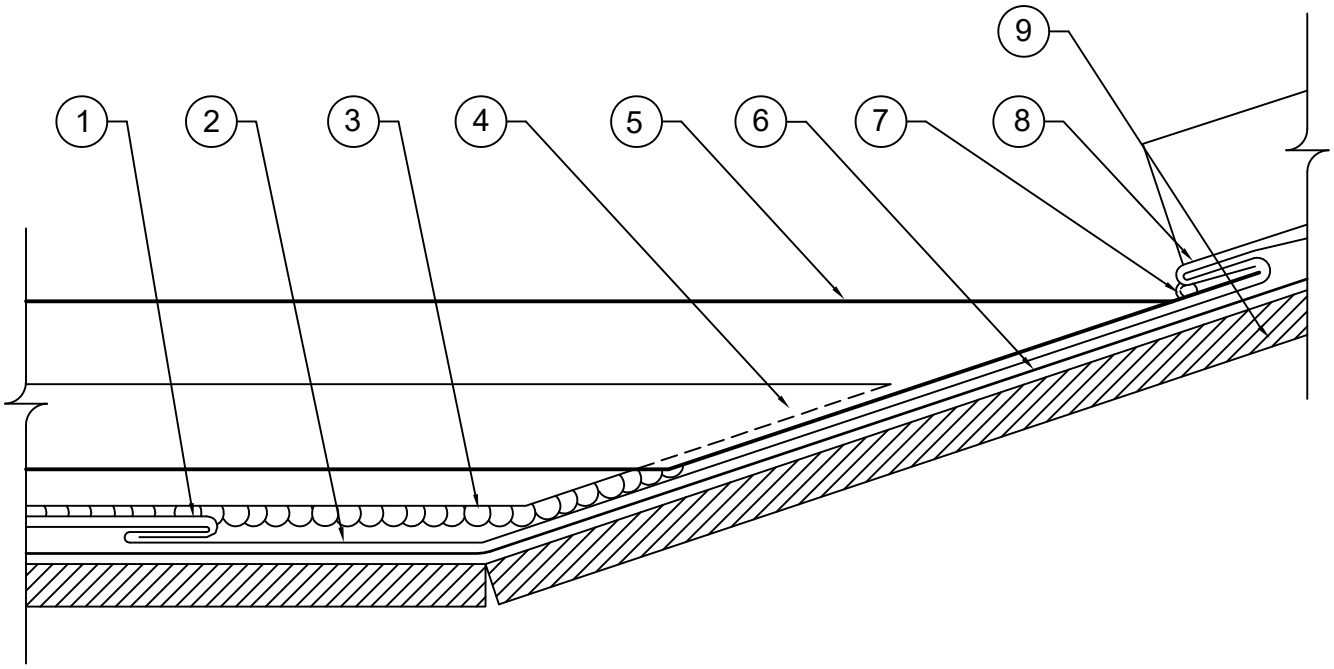

1. CUT MPS PANEL LEG OFF THE PANEL AND HEM AROUND VALLEY OFFSET
2. VALLEY FLASHING, 12" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED EVERY 12" O.C. WITH MPS APPROVED FASTENERS
3. MPS APPROVED BUYTL TAPE CONTINUOUS UNDER Z-CLOSURE
4. Z-CLOSURE TAPERED TO ROOF SLOPE WITH MPS APPROVED SEALANT UP THE VERTICAL LEGS
5. RIDGE CAP, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP,TUCK TABS INTO VALLEY OFFSET HEM 1"
6. ONE LAYER OF MPS EPISTIK UNDERLAYMENT ALL OVER ROOF AND BEHIND ALL METAL FLASHINGS
7. AT THE END OF THE RIDGE COVER PUT A CONTINUOUS BEAD WITH MPS APPROVED SEALANT
8. MPS ROOF PANEL HEMMED AROUND THE VALLEY OFFSET
9. SUITABLE DECKING NOT BY MPS