Description:	Detail No.:
SIDEWALL AT BRICK DETAIL	MPS-SDW1
	Date: 7/21/26
Substrate: SUITABLE SUBSTRATE	

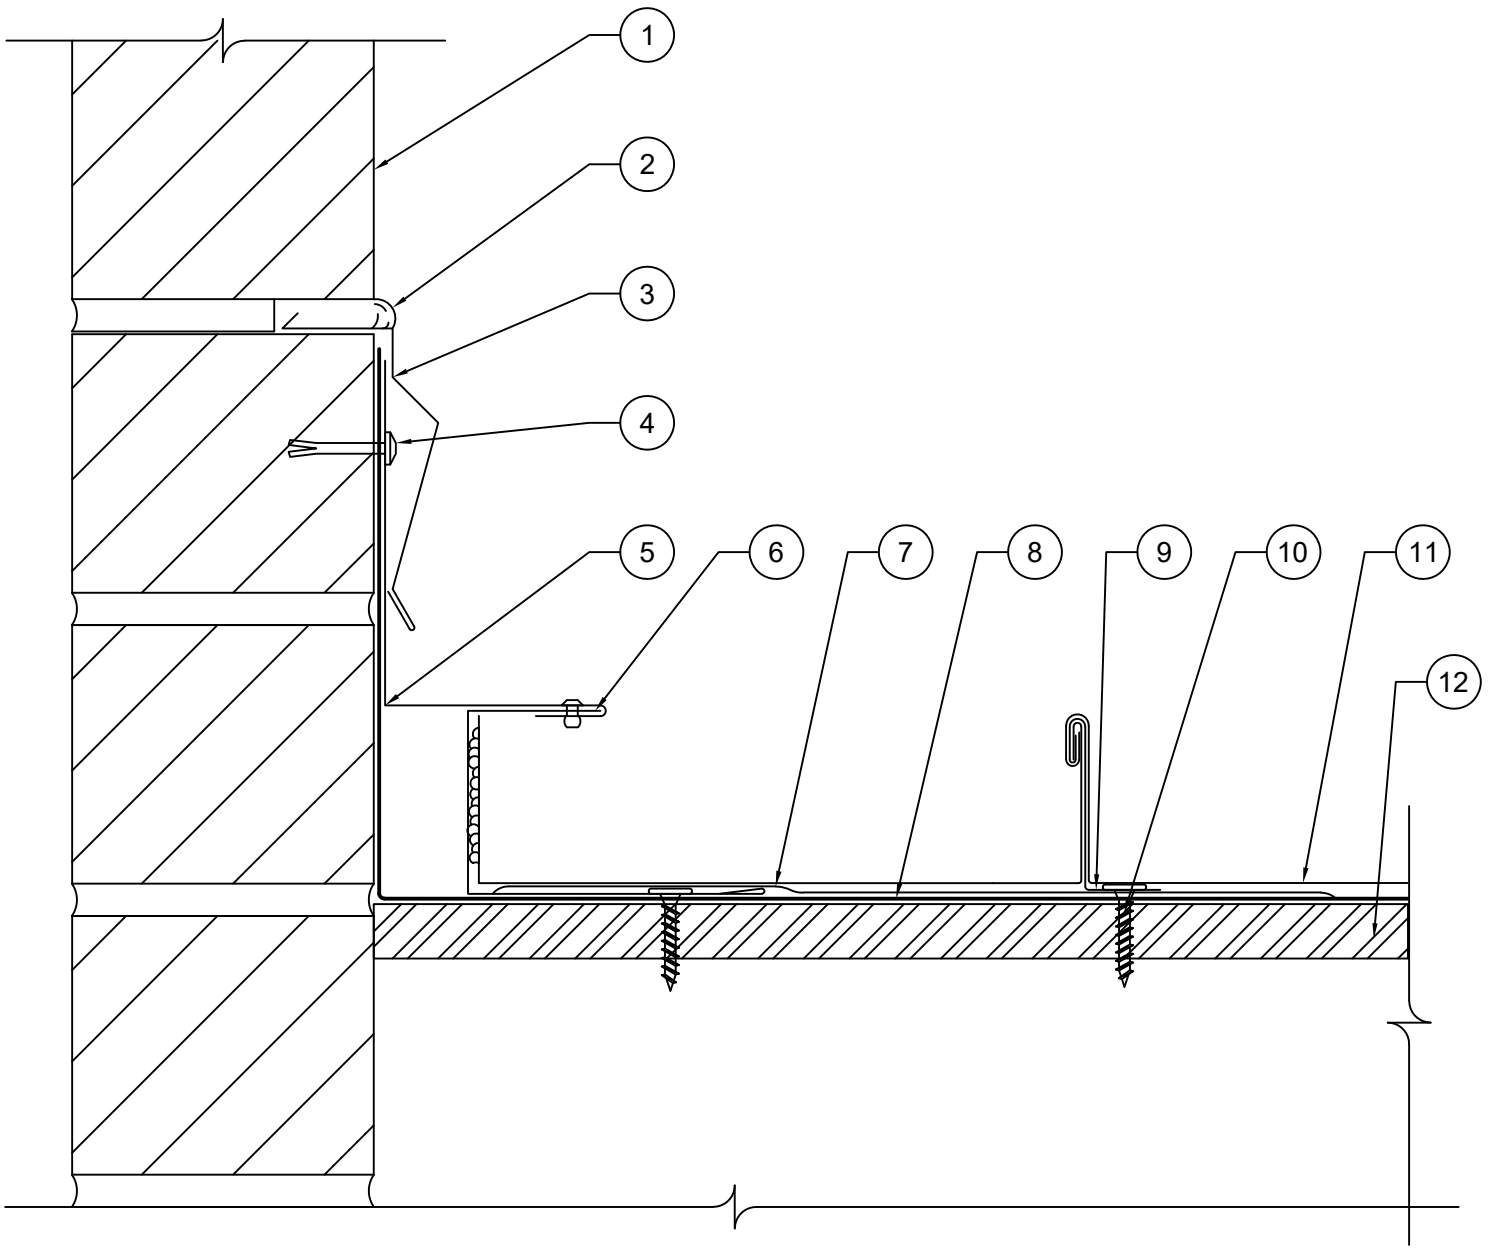

1. MASONRY WALL NOT BY MPS
2. CONTINUOUS BEAD OF MPS APPROVED SEALANT
3. REGLET FLASHING, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT
4. MASONRY DRIVE PIN
5. SIDE WALL FLASHING, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED 12" O.C. WITH MPS APPROVED FASTENERS
6. C-CHANNEL, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, FASTENED 12" O.C. WITH MPS APPROVED FASTENERS
7. AN ADDITIONAL LAYER OF MPS EPISTIK UNDERLAYMENT AT MINIMUM OF 9" TO STRIP IN C-CHANNEL
8. ONE LAYER OF MPS EPISTIK ALL OVER ROOF AND BEHIND ALL METAL FLASHINGS
9. MPS PANEL CLIP WITH MPS APPROVED FASTENERS(MP-200 CLIP IS SHOWN)
10. MPS APPROVED FASTENERS(#10 X 1-$\frac{1}{8}$" ULP PANCAKE HEAD WOOD FASTENER)
11. MPS METAL PANEL (MP-200 IS SHOWN)
12. SUITABLE DECKING NOT BY MPS