Description:	Detail No.:
VENTED RIDGE DETAIL	MPS-VHRD1
	Date: 7/21/26
Substrate: SUITABLE SUBSTRATE	

METAL PANEL SYSTEMS
GAUGES ABOVE

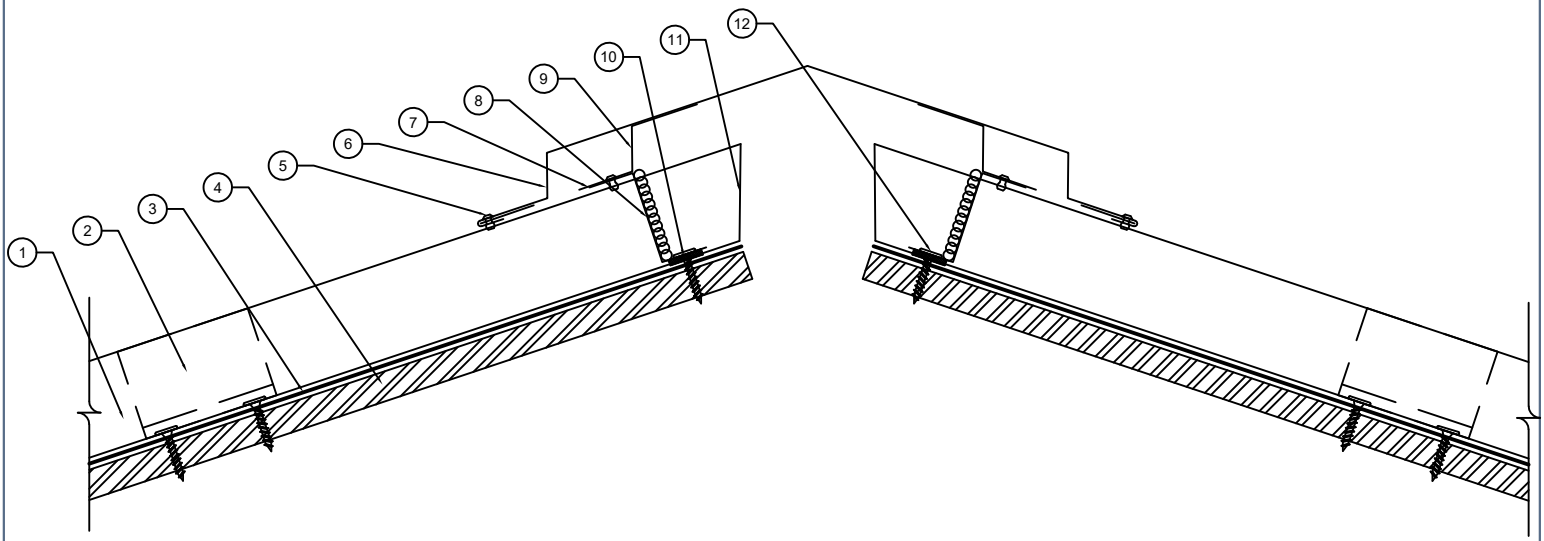

1. MPS PANEL (MP-200 SHOWN)
2. MPS PANEL CLIP WITH APPROVED FASTENERS WITH PANEL CLIP WITHIN 1' OF END OF PANEL
3. ONE LAYER OF MPS EPISTIK UNDERLAYMENT ALL OVER ROOF AND BEHIND ALL METAL FLASHINGS
4. SUITABLE DECKING NOT BY MPS
5. $\frac{1}{8}$" STAINLESS STEAL POP RIVETS TO MATCH TRIM
6. VENTED RIDGE COVER, 4" END LAP WITH A CONTINUOUS BEAD OF MPS APPROVED SEALANT IN THE LAP, POP RIVET TO Z-CLOSURES EVERY 30" O.C.
7. Z-CLOSURES FIELD CUT SET INTO BUYTL TAPE AND FASTENED 4" O.C. INSTALL MPS APPROVED SEALANT ON THE VERTICAL LEGS OF Z-CLOSURE SEALING TO PANEL LEGS
8. CONTINUOUS BEAD OF MPS APPROVED SEALANT UP VERTICAL LEG OF Z-CLOSURES
9. PERFORATED CLEAT, RIVET TO Z-CLOSURES 24" O.C.
10. MPS APPROVED BUYTL TAPE CONTINUOUS
11. BREAD PAN THE END OF PANEL WITHOUT CUTTING CORNERS
12. MPS APPROVED FASTENER (#10 X 1-$\frac{1}{8}$" ULP PANCAKE HEAD WOOD SCREW SHOWN)