



# SureLok PANEL

Standing Seam Series



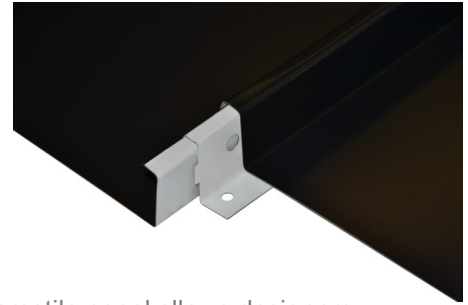


## OVERVIEW

The Sure-Lok Panel has a traditional look with a time proven seam profile. This versatile panel allows designers aesthetic flexibility without compromising the integrity of the roof system. From low to steep slope, straight to curved, structural to architectural applications, the Sure-Lok Panel is the perfect choice for a multifaceted project.

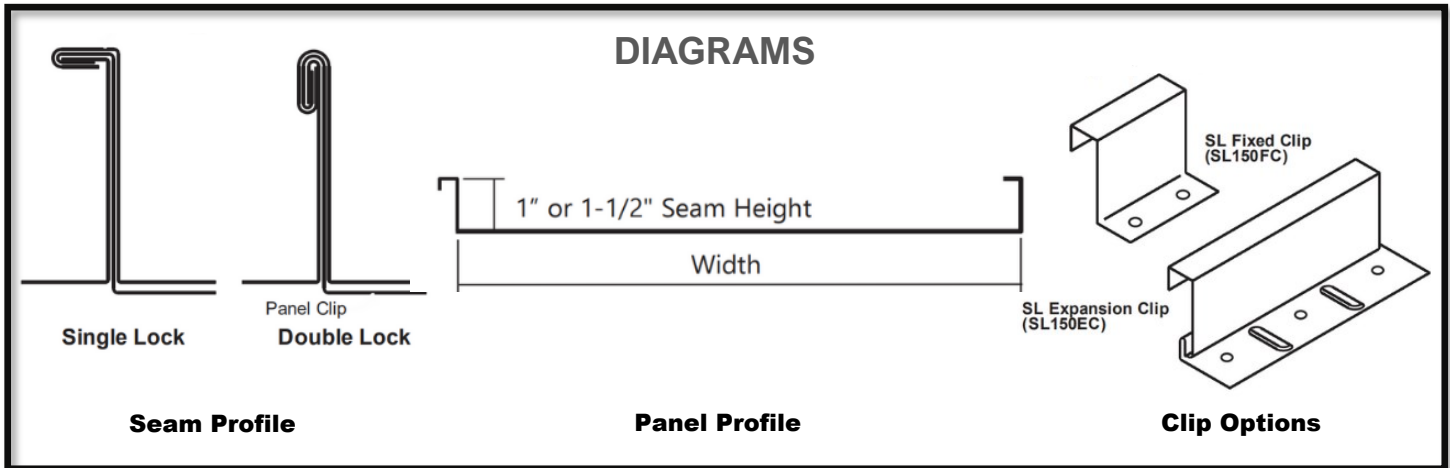

MATERIAL	1-1/2" SEAM HEIGHT	
	STANDARD / OPTIONAL	STANDARD / OPTIONAL
24 ga. Steel	16" / Optional Widths Available	17" / Optional Widths Available
22 ga. Steel	16" / Optional Widths Available	17" / Optional Widths Available
.032" Aluminum	12" / Optional Widths Available	13" / Optional Widths Available
16 oz Copper	16" / Optional Widths Available	16" / Optional Widths Available
20 oz Copper	16" / Optional Widths Available	16" / Optional Widths Available



## PRODUCT FEATURES

- SL150 has a 1.5-inch seam height
- SL100 has a 1-inch seam height
- Can be installed on Architectural (solid substrate) or Structural (open framing) applications
- Mechanically seamed sidelap with option of single or double lock
- Optional in-seam sealant can be used on slopes less than 3:12
- Can be installed on slopes as low as to 2:12
- Continuous panel lengths
- Job site fabrication available
- ASTM E-1680-95 air infiltration tested
- ASTM E-1646-95 water penetration tested
- ASTM E-1592 structural performance tested
- Included in UL90 uplift resistance classified assemblies